

Выключатели для устройств ограничения скорости с ручным сбросом FR

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>



Main features

Safety switches designed specifically for speed limiters requiring high sensitivity, with a low actuating force.

Operation: the switch button is pressed up to the switching point. The button then continues to the limit of travel automatically.

Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2021000305000101
EAC approval:	RU C-IT.YT03.B.00035/19

Technical data

Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation:

One threaded conduit entry:

M20x1.5 (standard)

Protection degree acc. to EN 60529:

IP67 with cable gland of equal or higher protection degree

General data

Ambient temperature: -25°C ... +80°C (standard)
-40°C ... +80°C (T6 option)

Max. operating frequency: 3600 operating cycles/hour

Mechanical endurance: 1 million operating cycles
(FR 5A3-M2 / FR 11A3-M2)
50,000 operating cycles
(FR 17A3-M2 / FR 19A3-M2)

Mounting position: any

Safety parameter B_{10D} for NC contacts: 2,000,000 (FR 5A3-M2 / FR 11A3-M2)

100,000 (FR 17A3-M2 / FR 19A3-M2)

Mechanical interlock, not coded: type 1 acc. to EN ISO 14119

Tightening torques for installation: see page 155

Wire cross-sections and wire stripping lengths: see page 169

In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, EN 81-20, EN 81-50, UL 508, CSA 22.2 No.14

Approvals:

IEC 60947-5-1, UL 508, CSA 22.2 No.14, GB/T14048.5-2017.

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU,

Lift Directive 2014/33/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

Installation for safety applications:

Use only switches marked with the $\ominus$ symbol beside the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as stated in **standard EN 81-20 par. 5.11.2.2.1**. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 156. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 153 to 162.

Electrical data		Utilization category			
Thermal current (I_{th}):	10 A	Alternating current: AC15 (50–60 Hz)			
Rated insulation voltage (U_i):	500 Vac 600 Vdc	U_e (V)	250	400	500
	400 Vac 500 Vdc (contact block 11)	I_e (A)	6	4	1
Rated impulse withstand voltage (U_{imp}):	6 kV	Direct current: DC13			
Conditional short circuit current:	1000 A acc. to EN 60947-5-1	U_e (V)	24	125	250
Protection against short circuits:	type aM fuse 10 A 500 V	I_e (A)	3	0.55	0.3
Pollution degree:	3				

Features approved by IMQ


Rated insulation voltage (U_i):	500 Vac 400 Vac (for contact block 11)
Conventional free air thermal current (I_{th}):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U_{imp}):	6 kV
Protection degree of the housing:	IP67
MV terminals (screw terminals)	
Pollution degree:	3
Utilization category:	AC15
Operating voltage (U_e):	400 Vac (50 Hz)
Operating current (I_e):	3 A
Forms of the contact element:	Zb, Y+Y, Y+Y+X
Positive opening of contacts on contact blocks 5, 11, 17, 19	
In compliance with standards:	EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU

Please contact our technical department for the list of approved products.

Features approved by UL

Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	Types 1, 4X
For all contact blocks use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).	
The hub is to be connected to the conduit before the hub is connected to the enclosure.	


Please contact our technical department for the list of approved products.

**Compliant with EN 81-20 and EN 81-50**

- Safety contacts in compliance with EN 60947-5-1, annex K.
- Protection degree higher than IP4x.
- All switches meet requirements laid down by the new standards for safety contacts.


Contact blocks 17 and 19

Pizzato Elettrica has developed innovative and specific contact blocks, designed with a very short pre-travel distance and low actuating forces; as required by modern speed limiters.

**Protection degree IP67**

IP67

All switches of these series have protection degree IP67.

Increased actuating force

On request, contact block 19 can be supplied with increased actuating force of 4 or 6 N; ideal for applications with high levels of vibrations.

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options options
FR 19A3-E26GM2K23P11T6

Housing

FR technopolymer, one conduit entry

Contact block

5	1NO+1NC, snap action
11	2NC, snap action
17	1NC, snap action
19	2NC, snap action

Actuators

A3 short plunger

Actuating force

	standard actuating force
E26	actuating force 4 N (19 N ⊕) (only with contact block 19)
E27	actuating force 6 N (21 N ⊕) (only with contact block 19)

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Fixing plates

	without plate (standard)
P11	with VF SFP1 plate

Threaded conduit entry

M2	M20x1.5 (standard)
M1	M16x1.5
	PG 13.5
A	PG 11

Pre-installed cable glands

K23	for cables Ø 6 ... 12 mm
K27	for cables Ø 3 ... 7 mm

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts with 2.5 µm gold coating

Dimensional drawings

Contact type:

R = snap action


Contact block	5	11	17	19
Max. speed	0.5 m/s	0.5 m/s	0.5 m/s	0.5 m/s
Actuating force	3.5 N (25 N ⊕)	3.5 N (25 N ⊕)	1.5 N (25 N ⊕)	2 N (25 N ⊕)
Travel diagrams	0 2 ⊕ 4 6	0 2 ⊕ 4 6	0 1.5 ⊕ 6	0 1.5 ⊕ 4.5


Legend

— Closed contact | — Open contact | ⊕ Positive opening travel

All values in the drawings are in mm

Selection diagram

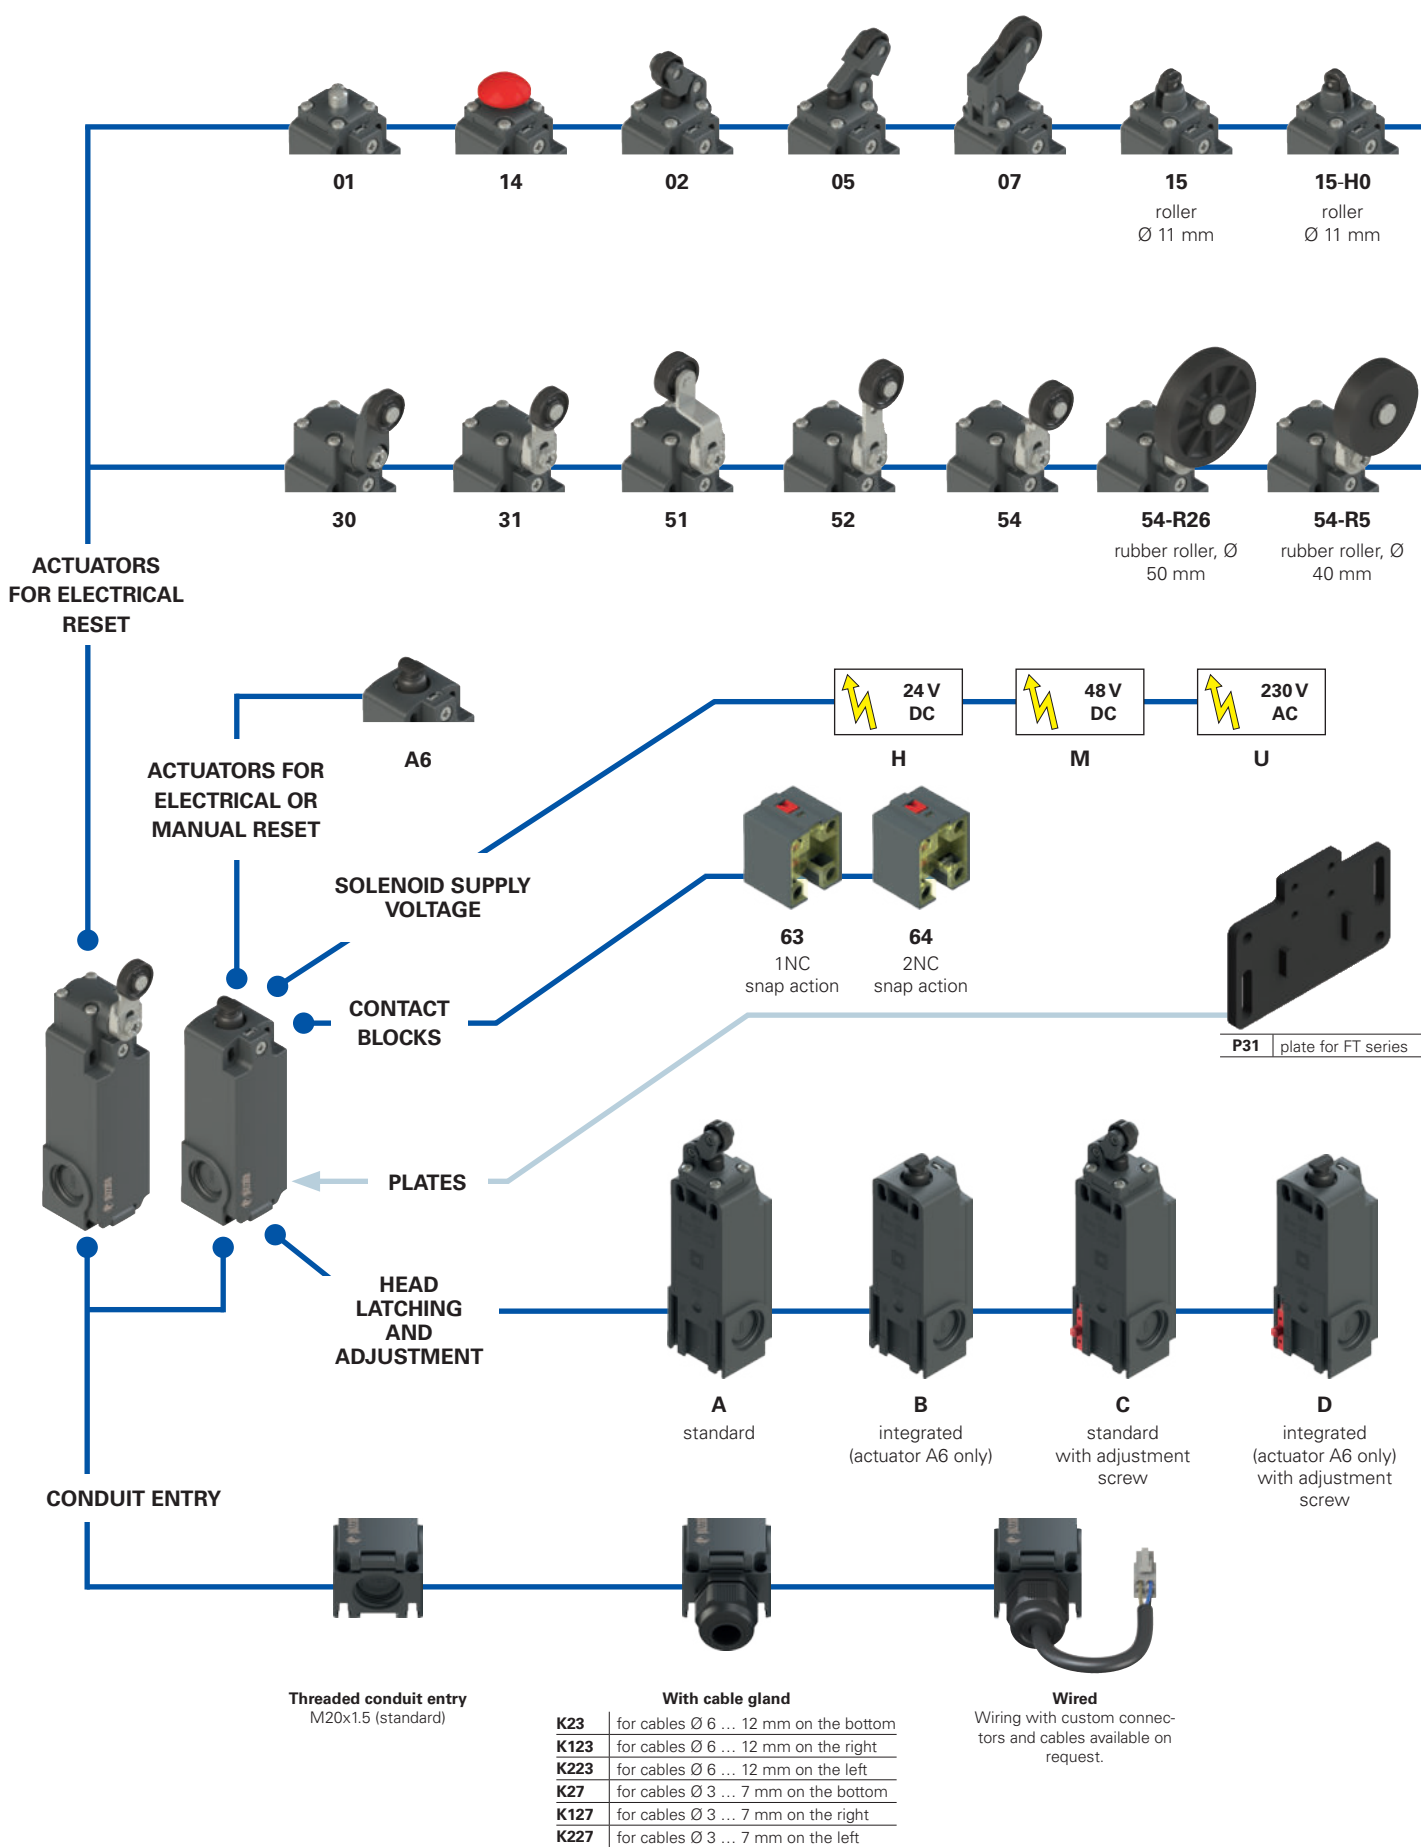

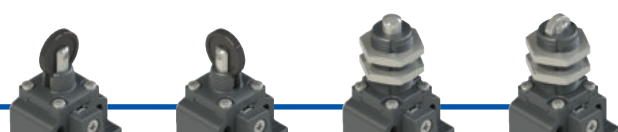


16
roller
Ø 20 mm

16-H0
roller
Ø 20 mm

12

13

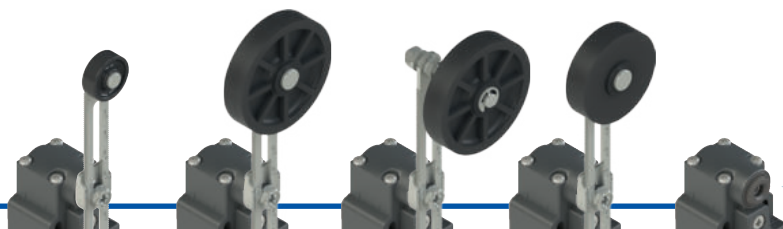

56

56-R26

56-R27

56-R5


38

adjustable safety
lever with rubber
roller, Ø 50 mm

adjustable safety
lever with rubber
roller, Ø 50 mm,
protruding

adjustable safety
lever with rubber
roller, Ø 40 mm

**SEPARATE
ACTUATORS**
See page 45



Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options
FT 2A6454AH-E27GK23P31T9R26

Housing

FT technopolymer, three conduit entries

Head latching and adjustment

A	standard
B	integrated (actuator A6 only)
C	standard with adjustment screw
D	integrated (actuator A6 only) with adjustment screw

Contact block

63	1NC, snap action
64	2NC, snap action

Actuators

A6	plunger with catch for manual reset
01	short plunger
02	roller lever
05	angled lever with roller
...	...

Solenoid supply voltage

H	24 Vdc 4.2 A (100 W)
M	48 Vdc 2.1 A (100 W)
U	230 Vac 0.5 A (115 W)
K	48 Vdc 0.75 A (36 W) (only with reduced actuating force E28)
J	24 Vdc 1.5 A (36 W) (only with reduced actuating force E28)

Rollers

	standard roller
R5	rubber roller, Ø 40 mm
R26	rubber roller, Ø 50 mm
R27	rubber roller, protruding, Ø 50 mm

Ambient temperature

	-25°C ... +50°C (standard)
T9	-40°C ... +50°C

Fixing plates

	without plate (standard)
P31	with VF SFP3 plate

Pre-installed cable glands

K23	for cables Ø 6 ... 12 mm
K27	for cables Ø 3 ... 7 mm

For the complete list of possible combinations please contact our sales department.

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts with 2.5 µm gold coating

Actuating force

E27	standard actuating force
E26	reduced actuating force
E28	reduced actuating force

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>