

Предохранительный тросовый выключатель без сброса для простой остановки

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04


Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>

Selection diagram

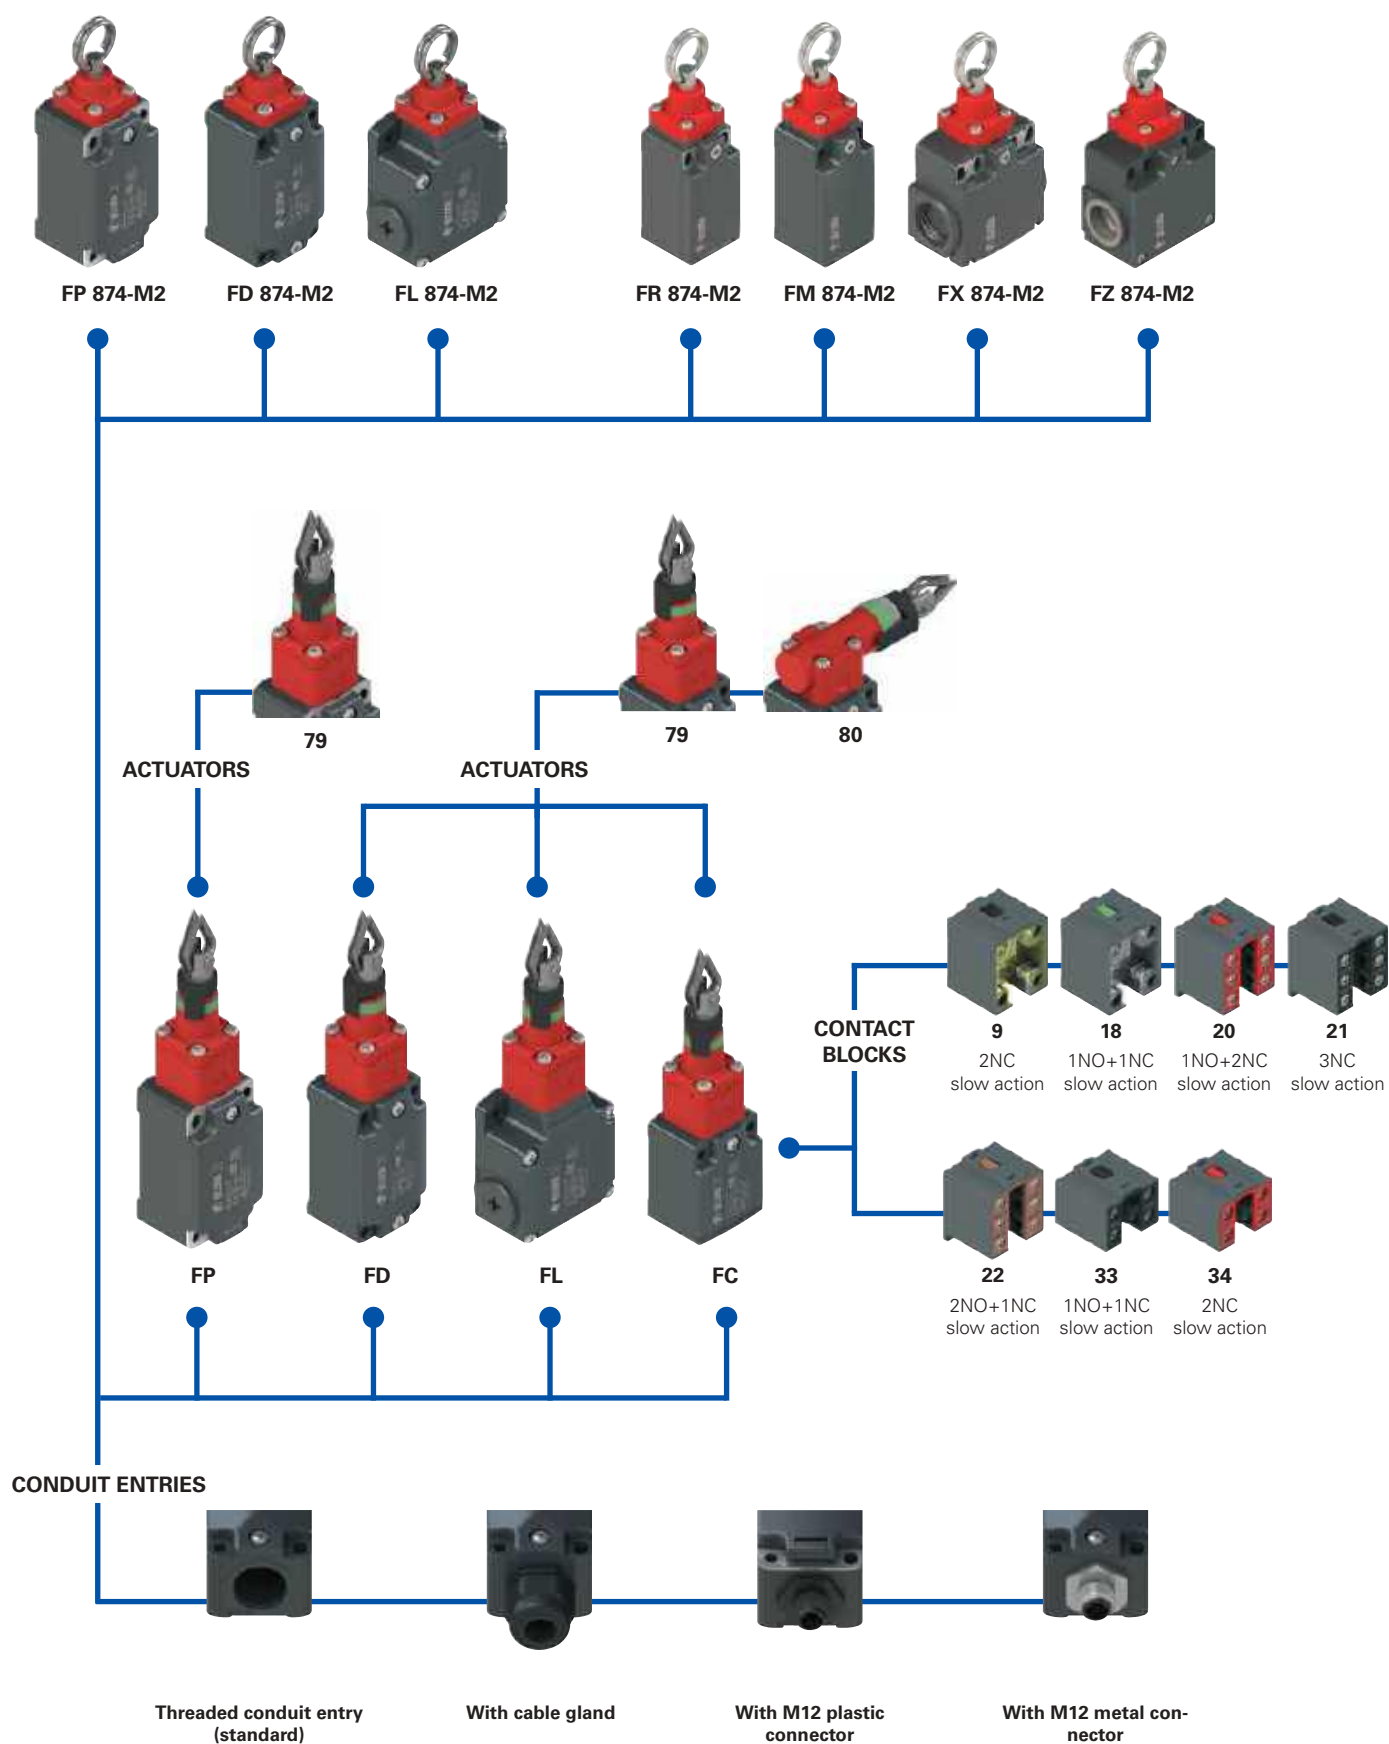



Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options options
FD 1879-E7GM2K50T6

Housing

FD	metal, one conduit entry
FL	metal, three conduit entries
FP	technopolymer, one conduit entry

Contact block

9	2NC, slow action
18	1NO+1NC, slow action
20	1NO+2NC, slow action
21	3NC, slow action
22	2NO+1NC, slow action
33	1NO+1NC, slow action
34	2NC, slow action

Actuating head

79	longitudinal head
80	transversal head (FD-FL housing only)

Actuating force

	standard
E7	initial 20 N...final 40 N (only head 79)
E9	initial 13 N...final 75 N (only head 80)

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 ... 12 mm
...	...
K50	M12 metal connector, 5-pole
...	...

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2	M20x1.5 (standard)
	PG 13.5

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	Silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 22, 33, 34)

article options options
FC 3379-E7GM2K50T6

Housing

FC	metal, one conduit entry
-----------	--------------------------

Contact blocks

33	1NO+1NC, slow action
34	2NC, slow action

Actuating head

79	longitudinal head
80	transversal head

Actuating force

	standard
E7	initial 20 N...final 40 N (only head 79)
E9	initial 13 N...final 75 N (only head 80)

Pre-installed cable glands

	no cable gland (standard)
K23	cable gland for cables Ø 6 ... 12 mm
K50	M12 metal connector, 5-pole

Threaded conduit entry

M2	M20x1.5 (standard)
	PG 11

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating

article options options
FD 874-E7GM2K50T6

Housing

FD	metal, one conduit entry
FL	metal, three conduit entries
FP	technopolymer, one conduit entry
FR	technopolymer, one conduit entry
FM	metal, one conduit entry
FX	technopolymer, two conduit entries
FZ	metal, two conduit entries

Actuating force

	standard
E7	initial 20 N...final 40 N

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts with 2.5 µm gold coating

Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 ... 12 mm
...	...
K50	M12 metal connector, 5-pole
...	...

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2	M20x1.5 (standard)
M1	M16x1.5 (FR-FX housing only)
	PG 13.5
A	PG 11 (FR-FX housing only)

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C



Main features

- Metal or plastic housing, from one to three conduit entries
- Protection degree IP67
- 7 contact blocks available
- Versions with vertical or horizontal actuation
- Versions with assembled M12 connector
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval:	EG605 (FD-FL-FP-FC series) EG610 (FR-FX-FM-FZ series)
UL approval:	E131787
CCC approval:	2021000305000099 (FD-FP-FL-FC series) 2021000305000101 (FR-FX-FM-FZ series)
EAC approval:	RU C-IT.YT03.B.00035/19

Technical data

Housing

FP, FR, FX series housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation:

FD, FL, FC, FM, FZ series: metal housing, baked powder coating.

FD, FP, FC, FR, FM series: one threaded conduit entry: M20x1.5 (standard)

FX series: two knock-out threaded conduit entries: M20x1.5 (standard)

FZ series: two threaded conduit entries: M20x1.5 (standard)

FL series: three threaded conduit entries: M20x1.5 (standard)

Protection degree: IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061
Performance Level (PL) up to: PL e acc. to EN ISO 13849-1

Safety parameters:

B_{10D} : 200,000 for NC contacts

Mission time: 20 years

Ambient temperature: -25°C ... +80°C (standard)

-40°C ... +80°C (T6 option)

Max. actuation frequency: 1 cycle / 6 s

Mechanical endurance: 100,000 operating cycles

Max. actuation speed: 0.5 m/s

Min. actuation speed: 1 mm/s

Tightening torques for installation: see pages 441 and 443

Wire cross-sections and

wire stripping lengths: see page 461

In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, UL 508, CSA C22.2 No. 14.

Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU,

RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 443 to 454.

Electrical data		Utilization category			
without connector	Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz)		
	Rated insulation voltage (U_i):	500 Vac 600 Vdc	U_e (V)	250	400
		400 Vac 500 Vdc	I_e (A)	6	4
	Rated impulse withstand voltage (U_{imp}):	6 kV (contact blocks 20, 21, 22, 33, 34)			
		4 kV (contact blocks 20, 21, 22, 33, 34)	Direct current: DC13		
with M12 connector, 4 and 5-pole	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	U_e (V)	24	125
	Protection against short circuits:	type aM fuse 10 A 500 V	I_e (A)	3	0.55
	Pollution degree:	3			
	Thermal current (I_{th}):	4 A	Alternating current: AC15 (50÷60 Hz)		
	Rated insulation voltage (U_i):	250 Vac 300 Vdc	U_e (V)	24	120
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 4 A 500 V	I_e (A)	4	4
	Pollution degree:	3	Direct current: DC13		
	Thermal current (I_{th}):	2 A	U_e (V)	24	125
	Rated insulation voltage (U_i):	30 Vac 36 Vdc	I_e (A)	3	0.55
	Protection against short circuits:	type gG fuse 2 A 500 V			




Description



These rope-operated safety switches are installed on machines or conveyor belts and facilitate the simple shut-down of the machine from any point and with any pull on the rope.

Provided with self-control function, they allow the constant monitoring of correct functioning, signalling with the opening of the contacts an eventual loosening or breaking of the rope.

Head with variable orientation

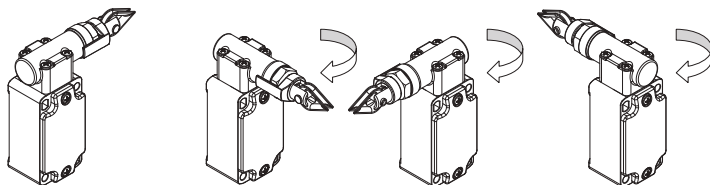

For all switches, the head can be adjusted in 90° steps after removing the four fastening screws.

Protection degree IP67

IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529.

They can therefore be used in all environments where the maximum degree of protection is required for the housing.


Extended temperature range

-40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.


Indicator for rope adjustment

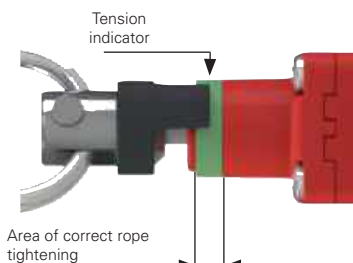

electrical safety contacts will open.

The switches (head 79 and 80) are provided with a green ring that shows the area of the correct tightening of the rope. The installer has only to tighten the rope until the black indicator will be in the middle of the green area. If the tension (or loosening) on the rope is so high that the black indicator exits the green area, the elec-

Actuating forces



These switches can be supplied with reduced hardness internal springs on request. The force required to actuate the switch can thereby be reduced without changing the actuating path of the electrical contacts. This is particularly advantageous for smaller spans, but must, however, always make use of rope pulleys.

Features approved by IMQ

Rated insulation voltage (Ui):	500 Vac 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 33, 34, 37)
Conventional free air thermal current (Ith):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U _{imp}):	6 kV 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)
Protection degree of the housing:	IP67
MV terminals (screw terminals)	
Pollution degree:	3
Utilization category:	AC15
Operating voltage (Ue):	400 Vac (50 Hz)
Operating current (Ie):	3 A
Forms of the contact element:	Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.
Positive opening of contacts on contact blocks	5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.
In compliance with standards:	EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.


Features approved by UL

Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	FR: Types 1, 4X FD, FP, FC, FM, FX, FZ, FL: Types 1, 4X, 12, 13
Use 60 or 75°C copper (Cu) conductor and wire size range	12, 14 AWG, stranded or solid.
The terminal tightening torque of 7.1 lb in (0.8 Nm).	
For FR, FP, FX series: the hub is to be connected to the conduit before the hub is connected to the enclosure.	

Please contact our technical department for the list of approved products.


Contact type:

L = slow action

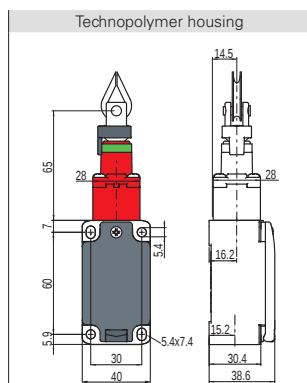


Contact block

9		FP 979-M2		2NC
18		FP 1879-M2		1NO+1NC
20		FP 2079-M2		1NO+2NC
21		FP 2179-M2		3NC
22		FP 2279-M2		2NO+1NC
33		FP 3379-M2		1NO+1NC
34		FP 3479-M2		2NC
Actuating force		Initial 63 N...final 83 N (90 N)		
Travel diagrams		Page 264 - group 1		

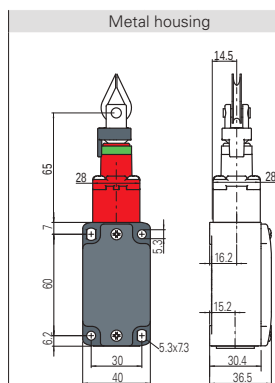


FD 979-M2	2NC
FD 1879-M2	1NO+1NC
FD 2079-M2	1NO+2NC
FD 2179-M2	3NC
FD 2279-M2	2NO+1NC
FD 3379-M2	1NO+1NC
FD 3479-M2	2NC
Initial 63 N...final 83 N (90 N)	
Page 264 - group 1	

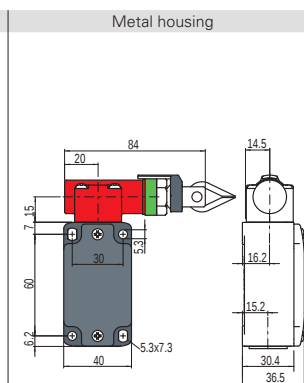

FD 980-M2	2NC
FD 1880-M2	1NO+1NC
FD 2080-M2	1NO+2NC
FD 2180-M2	3NC
FD 2280-M2	2NO+1NC
FD 3380-M2	1NO+1NC
FD 3480-M2	2NC
Initial 147 N...final 235 N (250 N)	
Page 264 - group 2	


Contact type:

L = slow action

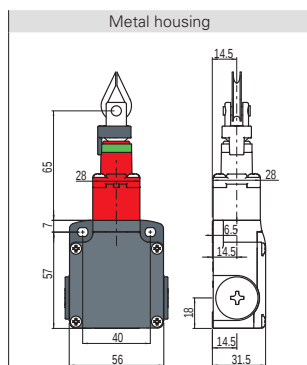


Contact block


9		FL 979-M2		2NC
18		FL 1879-M2		1NO+1NC
20		FL 2079-M2		1NO+2NC
21		FL 2179-M2		3NC
22		FL 2279-M2		2NO+1NC
33		FL 3379-M2		1NO+1NC
34		FL 3479-M2		2NC
Actuating force		Initial 63 N...final 83 N (90 N )		
Travel diagrams		Page 264 - group 1		

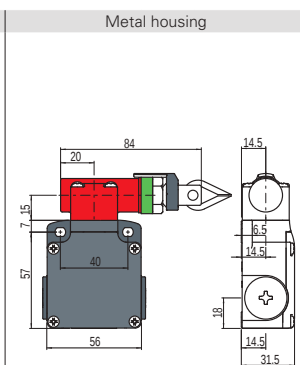

FL 980-M2	2NC
FL 1880-M2	1NO+1NC
FL 2080-M2	1NO+2NC
FL 2180-M2	3NC
FL 2280-M2	2NO+1NC
FL 3380-M2	1NO+1NC
FL 3480-M2	2NC
Initial 147 N...final 235 N (250 N)	
Page 264 - group 2	

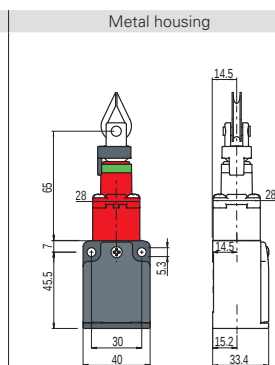


/	/
/	/
/	/
/	/
/	/
FC 3379-M2	1NO+1NC
FC 3479-M2	2NC
Initial 63 N...final 83 N (90 N)	
Page 264 - group 1	

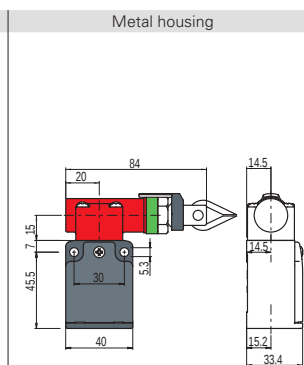

/	/
/	/
/	/
/	/
/	/
FC 3380-M2	1NO+1NC
FC 3480-M2	2NC
Initial 147 N...final 235 N (250 N)	
Page 264 - group 2	


Contact type:

L = slow action

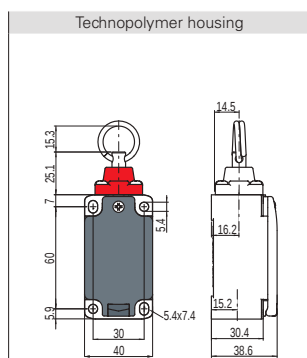


Contact block

Contact block			
8	<table><tr><td>L</td></tr></table> FP 874-M2	L	 1NC
L			
Actuating force		Initial 63 N...final 83 N (90 N )	
Travel diagrams		Page 264 - group 3	

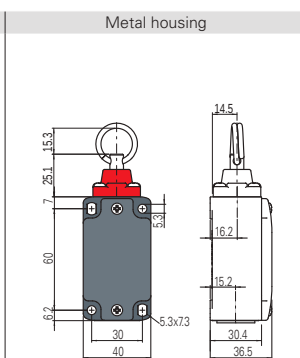


FD 874-M2	1NC
Initial 63 N...final 83 N (90 N)	
Page 264 - group 3	

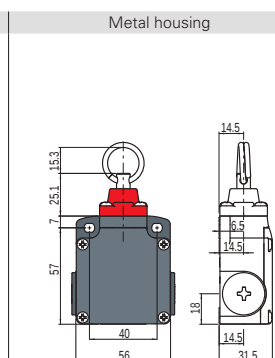

FL 874-M2	1NC
Initial 63 N...final 83 N (90 N)	
Page 264 - group 3	


How to read travel diagrams

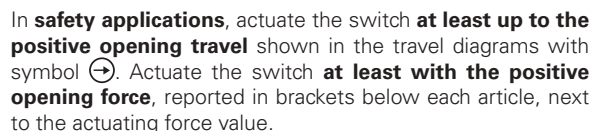
$$\begin{array}{cc} 11 & 21 \\ \downarrow & \downarrow \\ 12 & 22 \end{array}$$


In the rest position (with rope correctly tightened) the two contacts of **contact block 8** are both closed and are activated respectively by tightening or loosening the rope. In order to use this contact block for safety applications it is necessary to connect the two contacts in series. For this reason, in the wiring diagrams the **contact block 8** is indicated as 1NC, whereas in travel diagrams both contacts are indicated.

Application examples and max. rope length for switches with longitudinal head


Example A

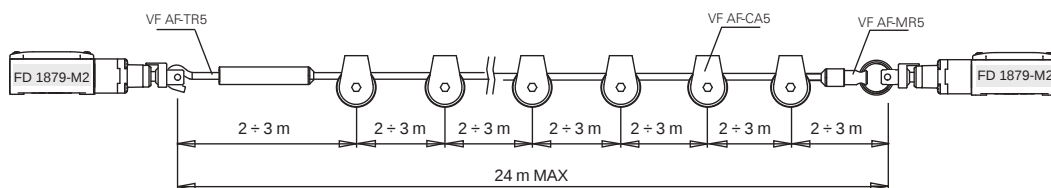


Example B

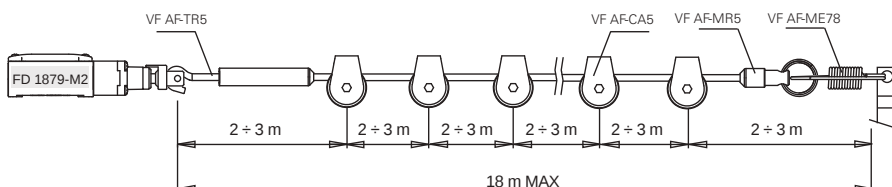


Example C

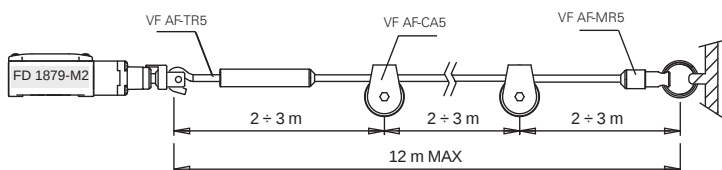

Example D

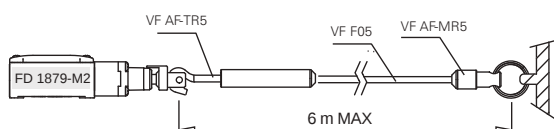


Example E

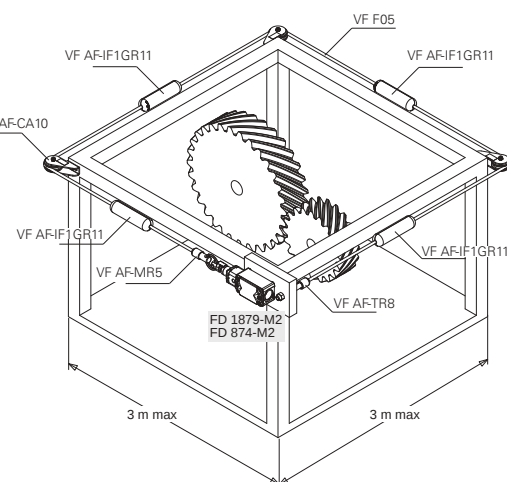


Application examples and max. rope length for switches with transversal head


Example F

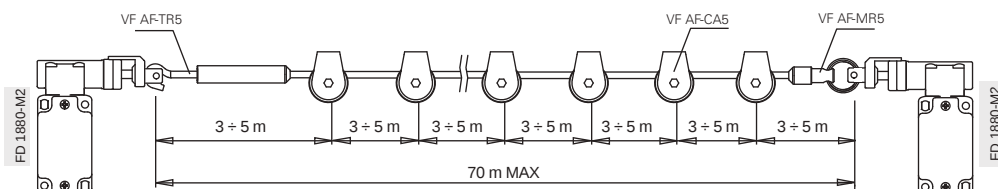


Example G

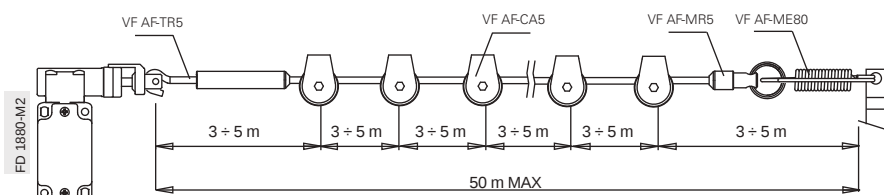


Example H

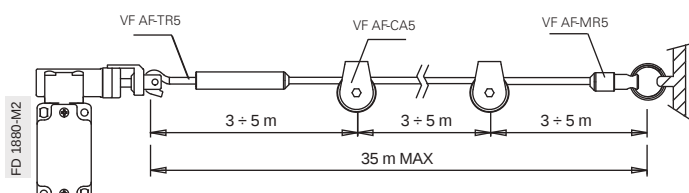

Example I

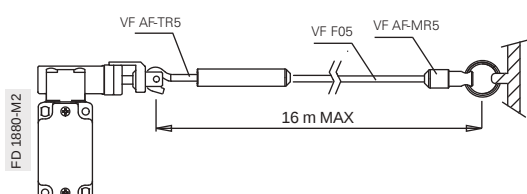


Example J

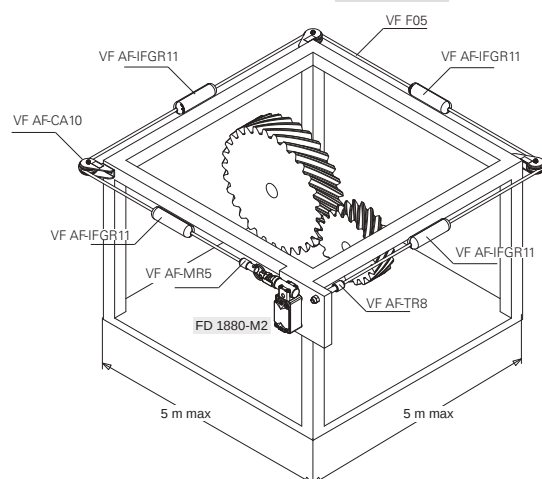


Maximum spans

Maximum spans for switches with longitudinal head

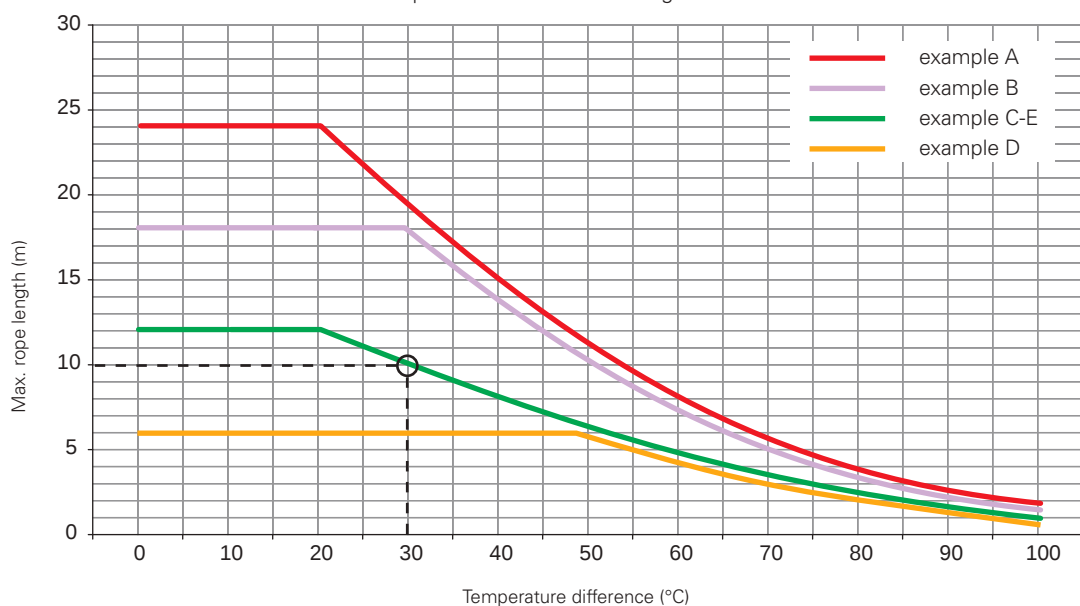


The max. recommended spans are indicated in the diagram as a function of the temperature fluctuations (temperature differences) to which the switch may be exposed at the point of use. For instance, with installation of type C and a temperature difference of 30°C, the max. recommended rope length is 10 metres.

Maximum spans for switches with transversal head

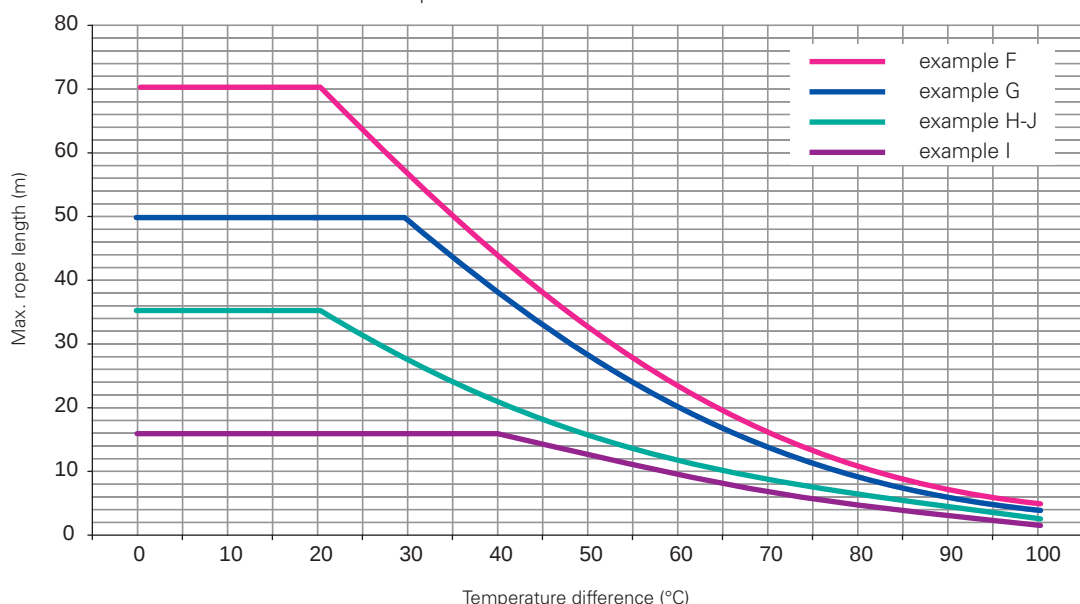


Important: The above data are guaranteed only using original rope and accessories. See page 267.

Adjustment of the switching point

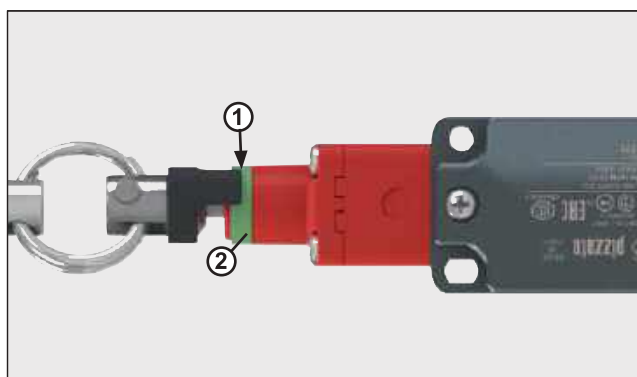

For switches with head 79 and 80: Tighten the rope connected to the switch, until the end of the indicator (1) reaches about the middle of the green ring (2).

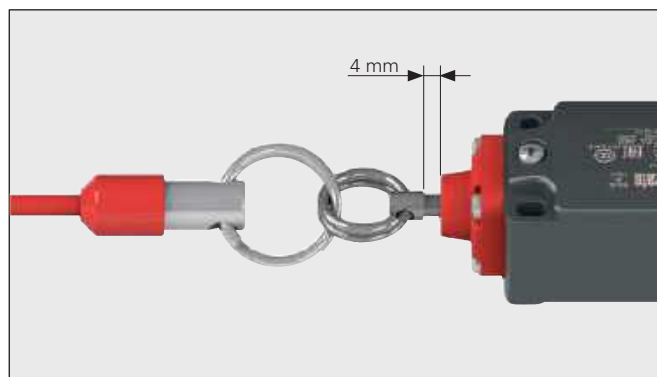

For switches with head 74: Tighten the rope connected to the switch until the thimble will be at about 4 mm from the head.



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04	Иваново (4932)77-34-06	Магнитогорск (3519)55-03-13	Ростов-на-Дону (863)308-18-15	Тольятти (8482)63-91-07
Ангарск (3955)60-70-56	Ижевск (3412)26-03-58	Москва (495)268-04-70	Рязань (4912)46-61-64	Томск (3822)98-41-53
Архангельск (8182)63-90-72	Иркутск (395)279-98-46	Мурманск (8152)59-64-93	Самара (846)206-03-16	Тула (4872)33-79-87
Астрахань (8512)99-46-04	Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Севастополь (8692)22-31-93	Улан-Удэ (3012)59-97-51
Благовещенск (4162)22-76-07	Кемерово (3842)65-04-62	Ноябрьск (3496)41-32-12	Саранск (8342)22-96-24	Уфа (347)229-48-12
Брянск (4832)59-03-52	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Владивосток (423)249-28-31	Коломна (4966)23-41-49	Омск (3812)21-46-40	Смоленск (4812)29-41-54	Чебоксары (8352)28-53-07
Владикавказ (8672)28-90-48	Кострома (4942)77-07-48	Орел (4862)44-53-42	Сочи (862)225-72-31	Челябинск (351)202-03-61
Владимир (4922)49-43-18	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Ставрополь (8652)20-65-13	Череповец (8202)49-02-64
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Сургут (3462)77-98-35	Чита (3022)38-34-83
Вологда (8172)26-41-59	Курск (4712)77-13-04	Петрозаводск (8142)55-98-37	Сыктывкар (8212)25-95-17	Якутск (4112)23-90-97
Воронеж (473)204-51-73	Курган (3522)50-90-47	Псков (8112)59-10-37	Тамбов (4752)50-40-97	Ярославль (4852)69-52-93
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пермь (342)205-81-47	Тверь (4822)63-31-35	

Россия +7(495)268-04-70	Казахстан +(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47
-------------------------	---------------------------	----------------------------	------------------------------	----------------------------