

Переключатели с ручным сбросом FR

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04


Беларусь +(375)257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>

Selection diagram

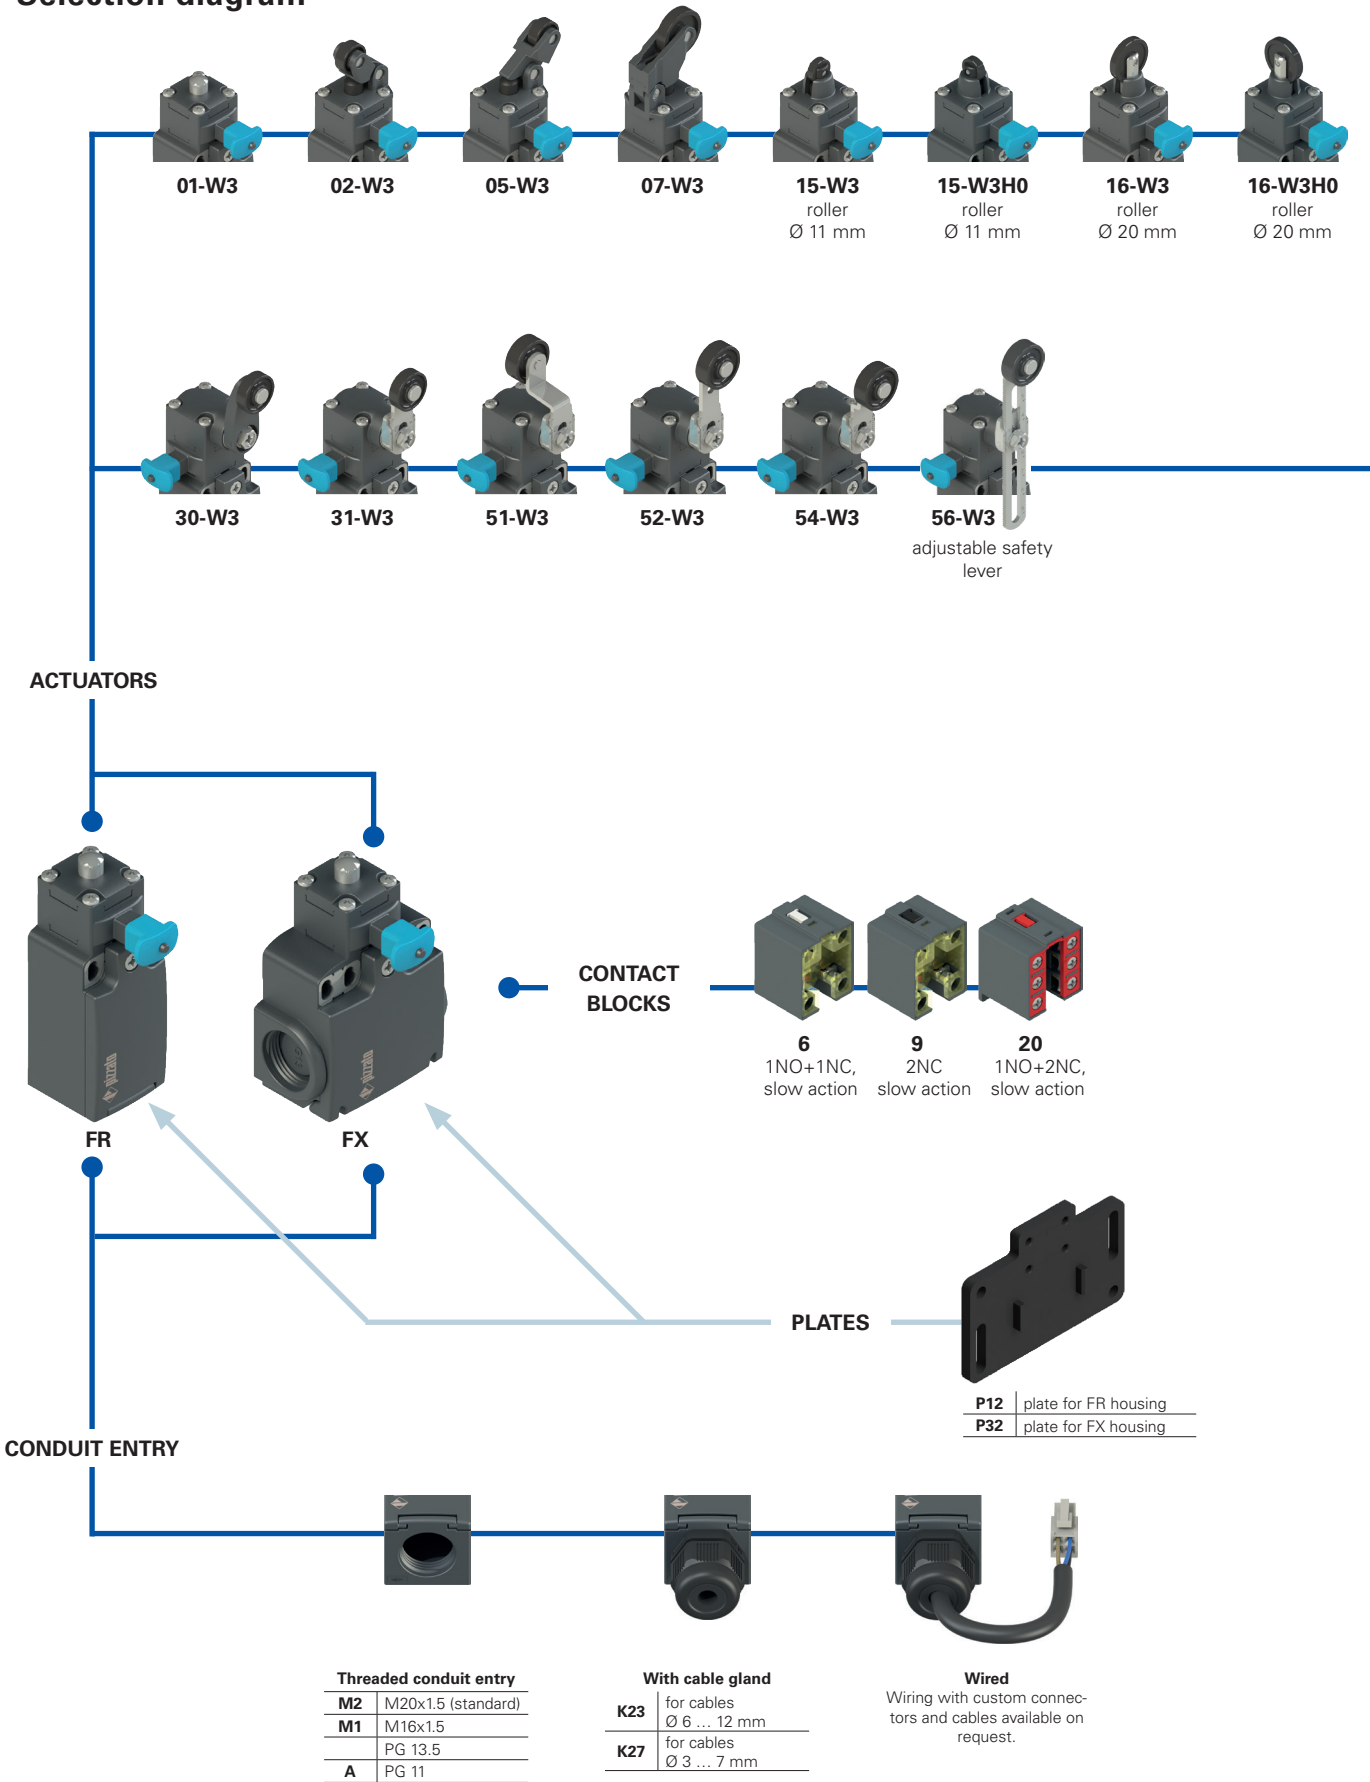

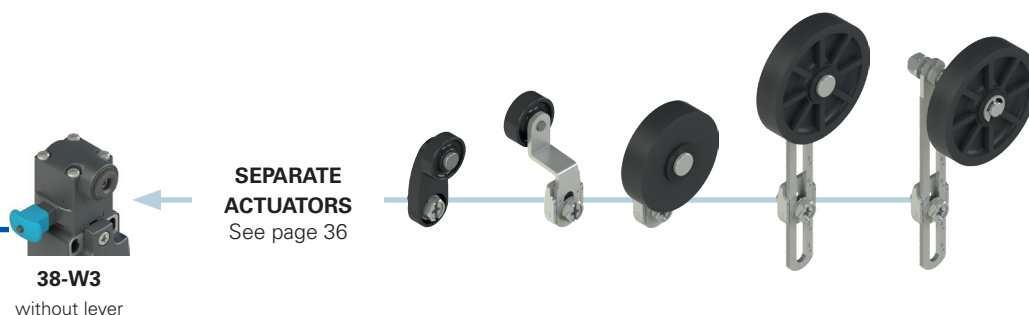
38-W3

without lever


**SEPARATE
ACTUATORS**
See page 36

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article option options
FR 655-W3GM2K23P12R26T6

Housing		Contact block		Actuators		Engagement reset		Contact type		Pre-installed cable glands		Threaded conduit entry		Rollers		Fixing plates		Ambient temperature	
FR	technopolymer, one conduit entry	6	1NO+1NC, slow action	01	short plunger	W3	simultaneous reset (standard)		silver contacts (standard)	K23	for cables Ø 6 ... 12 mm	M2	M20x1.5 (standard)		standard roller		without plate (standard)		-25°C ... +80°C (standard)
FX	technopolymer, two conduit entries	9	2NC, slow action	02	roller lever	W4	simultaneous reset with increased force	G	silver contacts with 1 µm gold coating	K27	for cables Ø 3 ... 7 mm	M1	M16x1.5	R5	rubber roller, Ø 40 mm	P12	with VF SFP1 plate for FR housing	T6	-40°C ... +80°C
		20	1NO+2NC, slow action	05	angled lever with roller			G1	silver contacts, 2.5 µm gold coating (not for contact block 20)				PG 13.5	R26	rubber roller, Ø 50 mm	P32	with VF SFP3 plate for FX housing		
				...	...							A	PG 11	R27	rubber roller, protruding, Ø 50 mm				

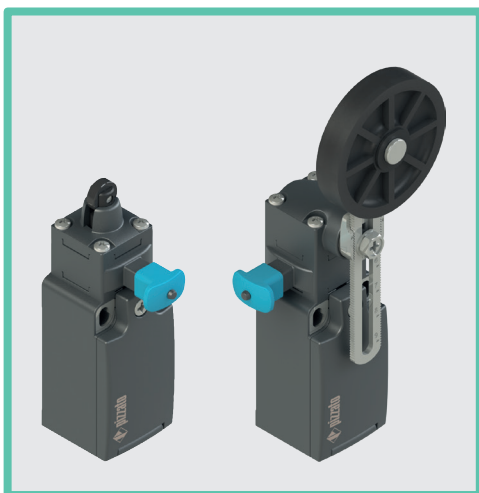

Main features

- Technopolymer housing, from one to two conduit entries
- Hinged cover, fixed with single captive screw
- Metal plates on mounting holes of the housing
- Protection degree IP67 and IP69K
- Wired versions
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2021000305000101
EAC approval:	RUC_IT.YT03.B.00035/19

Installation for safety applications:

Use only switches marked with the $\ominus$ symbol beside the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as stated in **standard EN 81-20 par. 5.11.2.2.1**. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 156. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 153 to 162.

Technical data

Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: $\square$

FR series, one conduit entry:

M20x1.5 (standard)

FX series, two knock-out threaded conduit entries:

M20x1.5 (standard)

Protection degree:

IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

IP69K acc. to ISO 20653 with cable gland of equal or higher protection degree

General data

Ambient temperature:

-25°C ... +80°C (standard)

-40°C ... +80°C (T6 option)

Max. operating frequency:

3600 operating cycles/hour

Mechanical endurance:

20 million operating cycles

Mounting position:

any

Safety parameter B_{10D} :

40,000,000 for NC contacts

Mechanical interlock, not coded:

type 1 acc. to EN ISO 14119

Tightening torques for installation:

see page 155

Wire cross-sections and

wire stripping lengths:

see page 169

In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, EN 81-20, EN 81-50, UL 508, CSA 22.2 No.14

Approvals:

IEC 60947-5-1, UL 508, CSA 22.2 No.14, GB/T14048.5-2017.

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU,

Lift Directive 2014/33/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

Electrical data		Utilization category		
Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz)		
Rated insulation voltage (U_i):	500 Vac 600 Vdc	U_e (V)	250	400
	400 Vac 500 Vdc (contact block 20)	I_e (A)	6	4
Rated impulse withstand voltage (U_{imp}):	6 kV			1
	4 kV (contact block 20)	Direct current: DC13		
Conditional short circuit current:	1000 A acc. to EN 60947-5-1	U_e (V)	24	125
Protection against short circuits:	type aM fuse 10 A 500 V	I_e (A)	3	0.55
Pollution degree:	3			0.3

Features approved by IMQ

Rated insulation voltage (U_i):	500 Vac
	400 Vac (for contact block 20)
Conventional free air thermal current (I_{th}):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U_{imp}):	6 kV
	4 kV (for contact block 20)
Protection degree of the housing:	IP67
MV terminals (screw terminals)	
Pollution degree:	3
Utilization category:	AC15
Operating voltage (U_e):	400 Vac (50 Hz)
Operating current (I_e):	3 A
Forms of the contact element:	Zb, Y+Y, Y+Y+X
Positive opening of contacts on contact blocks 6, 9, 20	
In compliance with standards:	EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU

Please contact our technical department for the list of approved products.

Features approved by UL

Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc)
	A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	FR: Types 1, 4X
	FX: Types 1, 4X, 12, 13


For all contact blocks use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).

The hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.


Orientation of reset device adjustable

The reset device can be turned independently of the above actuator, making positioning of the product incredibly flexible. Extracting the blue button resets the device – as laid down in the standards – to prevent unintentional reset.

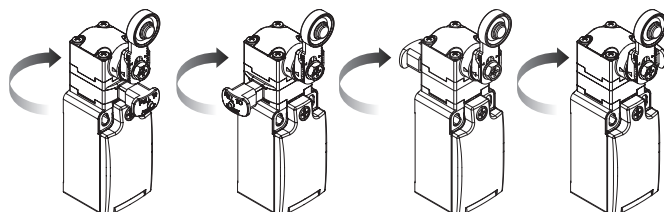

W3 simultaneous reset

Pizzato Elettrica has developed and patented an innovative reset device. This device ensures that, when the switch is activated, the electrical contacts trip and the reset system latches simultaneously. As a result, snap action contact blocks are no longer required, and furthermore, problems resulting from delays between the reset button latching and contacts opening are avoided.

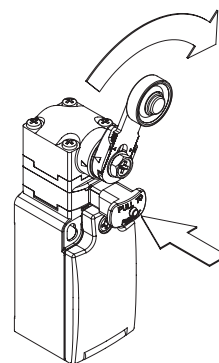


Compliant with EN 81-20 and EN 81-50




- Safety contacts in compliance with EN 60947-5-1, annex K.
- Protection degree higher than IP4x.
- Mechanical service life > 10⁶ cycles.

Cable outlets

Switches available with cable outlets in various directions, for use in the most confined of spaces.

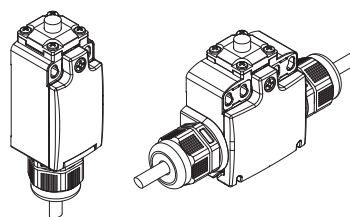


Increased actuating force



The switch can be delivered with increased actuating force (option WV4). Ideal for vibration applications.

Actuators	Force
01, 14, 15, 16	7 N
02, 05	6 N
07	3.5 N
30 ... 56	0.08 Nm

Adjustable safety lever




The adjustable lever code 56 (and variants) is provided with a notching that prevents the sliding also in case the fastening screw becomes loose.

Protection degrees IP67 and IP69K

IP69K
IP67


These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. All switches with actuator that do not have an external rubber hood also have a protection degree of IP69K in accordance with ISO 20653, and can be used on machinery subject to washing with water jets at 100 bar and 80°C.

Adapter plates



Fixing plate with large slotted holes for switching point adjustment. Developed for backwards compatibility with previous products. Each plate is provided with two pairs of mounting holes, one for standard switches and one for switches with reset device. The actuator thus always has the same actuating point.


Adjustable levers



For switches with swivelling lever, the lever can be adjusted in 10° steps over the entire 360° range. The positive movement transmission is always guaranteed thanks to the particular geometrical coupling between the lever and the revolving shaft as prescribed for safety applications by the German standard BG-GS-ET-15.


Reversible levers

For switches with swivelling lever, the lever can be fastened on straight or reverse side maintaining the positive coupling. In this way two different working planes of the lever are possible.

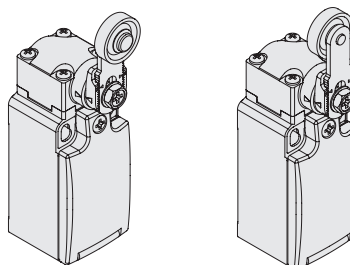

Head with variable orientation

The head of all switches is adjustable in 90° steps.

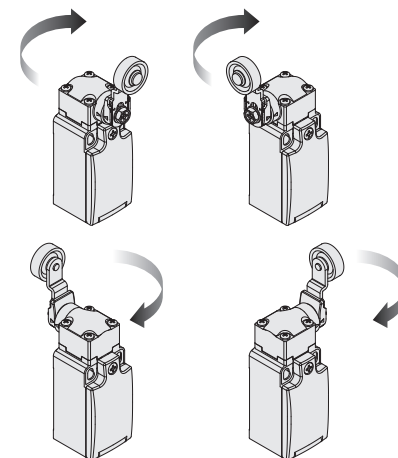

Extended temperature range

-40°C





These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers, and other equipment operated in very low-temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

3 Switches with manual reset

Contact type:

L = slow action




Contact block

6 L	FR 601-W3M2	1NO+1NC	FR 602-W3M2	1NO+1NC	FR 605-W3M2	1NO+1NC	FR 607-W3M2	1NO+1NC
9 L	FR 901-W3M2	2NC	FR 902-W3M2	2NC	FR 905-W3M2	2NC	FR 907-W3M2	2NC
20 L	FR 2001-W3M2	1NO+2NC	FR 2002-W3M2	1NO+2NC	FR 2005-W3M2	1NO+2NC	FR 2007-W3M2	1NO+2NC
Max. speed	page 155 - type 4		page 155 - type 3		page 155 - type 3		page 155 - type 3	
Actuating force	4.5 N (25 N)		4 N (25 N)		4 N (25 N)		2.5 N (25 N)	
Travel diagrams	page 156 - group 1c		page 156 - group 2c		page 156 - group 2c		page 156 - group 3c	


Contact type:

L = slow action


With Ø 12 mm stainless steel roller on request




With Ø 12 mm stainless steel roller on request



With Ø 12 mm stainless steel roller on request



With Ø 12 mm stainless steel roller on request







Contact block

6 L	FR 615-W3M2	1NO+1NC	FR 615-W3M2P12	1NO+1NC	FR 615-W3H0M2	1NO+1NC	FR 615-W3H0M2P12	1NO+1NC
9 L	FR 915-W3M2	2NC	FR 915-W3M2P12	2NC	FR 915-W3H0M2	2NC	FR 915-W3H0M2P12	2NC
20 L	FR 2015-W3M2	1NO+2NC	FR 2015-W3M2P12	1NO+2NC	FR 2015-W3H0M2	1NO+2NC	FR 2015-W3H0M2P12	1NO+2NC
Max. speed	page 155 - type 2		page 155 - type 2		page 155 - type 2		page 155 - type 2	
Actuating force	4.5 N (25 N)		4.5 N (25 N)		4.5 N (25 N)		4.5 N (25 N)	
Travel diagrams	page 156 - group 1c		page 156 - group 1c		page 156 - group 1c		page 156 - group 1c	

Contact type:

L = slow action



Contact block

6 L	FR 616-W3M2	1NO+1NC	FR 616-W3M2P12	1NO+1NC	FR 616-W3H0M2	1NO+1NC	FR 616-W3H0M2P12	1NO+1NC
9 L	FR 916-W3M2	2NC	FR 916-W3M2P12	2NC	FR 916-W3H0M2	2NC	FR 916-W3H0M2P12	2NC
20 L	FR 2016-W3M2	1NO+2NC	FR 2016-W3M2P12	1NO+2NC	FR 2016-W3H0M2	1NO+2NC	FR 2016-W3H0M2P12	1NO+2NC
Max. speed	page 155 - type 2		page 155 - type 2		page 155 - type 2		page 155 - type 2	
Actuating force	4.5 N (25 N)		4.5 N (25 N)		4.5 N (25 N)		4.5 N (25 N)	
Travel diagrams	page 156 - group 1c		page 156 - group 1c		page 156 - group 1c		page 156 - group 1c	



Contact type: L = slow action	With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request	
Contact block								
6 L	FX 615-W3M2	➔ 1NO+1NC	FX 615-W3M2P32	➔ 1NO+1NC	FX 615-W3H0M2	➔ 1NO+1NC	FX 615-W3H0M2P32	➔ 1NO+1NC
9 L	FX 915-W3M2	➔ 2NC	FX 915-W3M2P32	➔ 2NC	FX 915-W3H0M2	➔ 2NC	FX 915-W3H0M2P32	➔ 2NC
20 L	FX 2015-W3M2	➔ 1NO+2NC	FX 2015-W3M2P32	➔ 1NO+2NC	FX 2015-W3H0M2	➔ 1NO+2NC	FX 2015-W3H0M2P32	➔ 1NO+2NC
Max. speed	page 155 - type 2		page 155 - type 2		page 155 - type 2		page 155 - type 2	
Actuating force	4.5 N (25 N ➔)		4.5 N (25 N ➔)		4.5 N (25 N ➔)		4.5 N (25 N ➔)	
Travel diagrams	page 156 - group 1c		page 156 - group 1c		page 156 - group 1c		page 156 - group 1c	




Contact type: L = slow action	With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request		With Ø 12 mm stainless steel roller on request	
Contact block								
6 L	FX 616-W3M2	➔ 1NO+1NC	FX 616-W3M2P32	➔ 1NO+1NC	FX 616-W3H0M2	➔ 1NO+1NC	FX 616-W3H0M2P32	➔ 1NO+1NC
9 L	FX 916-W3M2	➔ 2NC	FX 916-W3M2P32	➔ 2NC	FX 916-W3H0M2	➔ 2NC	FX 916-W3H0M2P32	➔ 2NC
20 L	FX 2016-W3M2	➔ 1NO+2NC	FX 2016-W3M2P32	➔ 1NO+2NC	FX 2016-W3H0M2	➔ 1NO+2NC	FX 2016-W3H0M2P32	➔ 1NO+2NC
Max. speed	page 155 - type 2		page 155 - type 2		page 155 - type 2		page 155 - type 2	
Actuating force	4.5 N (25 N ➔)		4.5 N (25 N ➔)		4.5 N (25 N ➔)		4.5 N (25 N ➔)	
Travel diagrams	page 156 - group 1c		page 156 - group 1c		page 156 - group 1c		page 156 - group 1c	

Contact type: L = slow action	With Ø 20 mm stainless steel roller on request		Other rollers available. See page 36		Other rollers available. See page 36		Other rollers available. See page 36	
Contact block								
6 L	FR 630-W3M2	➔ 1NO+1NC	FR 631-W3M2	➔ 1NO+1NC	FR 651-W3M2	➔ 1NO+1NC	FR 652-W3M2	➔ 1NO+1NC
9 L	FR 930-W3M2	➔ 2NC	FR 931-W3M2	➔ 2NC	FR 951-W3M2	➔ 2NC	FR 952-W3M2	➔ 2NC
20 L	FR 2030-W3M2	➔ 1NO+2NC	FR 2031-W3M2	➔ 1NO+2NC	FR 2051-W3M2	➔ 1NO+2NC	FR 2052-W3M2	➔ 1NO+2NC
Max. speed	page 155 - type 1		page 155 - type 1		page 155 - type 1		page 155 - type 1	
Actuating force	0.07 Nm (0.25 Nm ➔)		0.07 Nm (0.25 Nm ➔)		0.07 Nm (0.25 Nm ➔)		0.07 Nm (0.25 Nm ➔)	
Travel diagrams	page 156 - group 4c		page 156 - group 4c		page 156 - group 4c		page 156 - group 4c	

3 Switches with manual reset

Contact type:

L = slow action







Contact block

6	L	FR 654-W3M2	➔	1NO+1NC	FR 654-W3M2R26	➔	1NO+1NC	FR 654-W3M2R5	➔	1NO+1NC
9	L	FR 954-W3M2	➔	2NC	FR 954-W3M2R26	➔	2NC	FR 954-W3M2R5	➔	2NC
20	L	FR 2054-W3M2	➔	1NO+2NC	FR 2054-W3M2R26	➔	1NO+2NC	FR 2054-W3M2R5	➔	1NO+2NC
Max. speed		page 155 - type 1			page 155 - type 1			page 155 - type 1		
Actuating force		0.07 Nm (0.25 Nm ➔)			0.07 Nm (0.25 Nm ➔)			0.07 Nm (0.25 Nm ➔)		
Travel diagrams		page 156 - group 4c			page 156 - group 4c			page 156 - group 4c		

Contact type:

L = slow action



Contact block

6	L	FR 656-W3M2	➔	1NO+1NC	FR 656-W3M2R26	➔	1NO+1NC	FR 656-W3M2R27	➔	1NO+1NC	FR 656-W3M2R5	➔	1NO+1NC
9	L	FR 956-W3M2	➔	2NC	FR 956-W3M2R26	➔	2NC	FR 956-W3M2R27	➔	2NC	FR 956-W3M2R5	➔	2NC
20	L	FR 2056-W3M2	➔	1NO+2NC	FR 2056-W3M2R26	➔	1NO+2NC	FR 2056-W3M2R27	➔	1NO+2NC	FR 2056-W3M2R5	➔	1NO+2NC
Max. speed		page 155 - type 1			page 155 - type 1			page 155 - type 1			page 155 - type 1		
Actuating force		0.07 Nm (0.25 Nm ➔)			0.07 Nm (0.25 Nm ➔)			0.07 Nm (0.25 Nm ➔)			0.07 Nm (0.25 Nm ➔)		
Travel diagrams		page 156 - group 4c			page 156 - group 4c			page 156 - group 4c			page 156 - group 4c		



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>