

Предохранительные выключатели с отдельным приводом для стандартных применений FR, FK

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>

Safety switches with separate actuator

Selection diagram

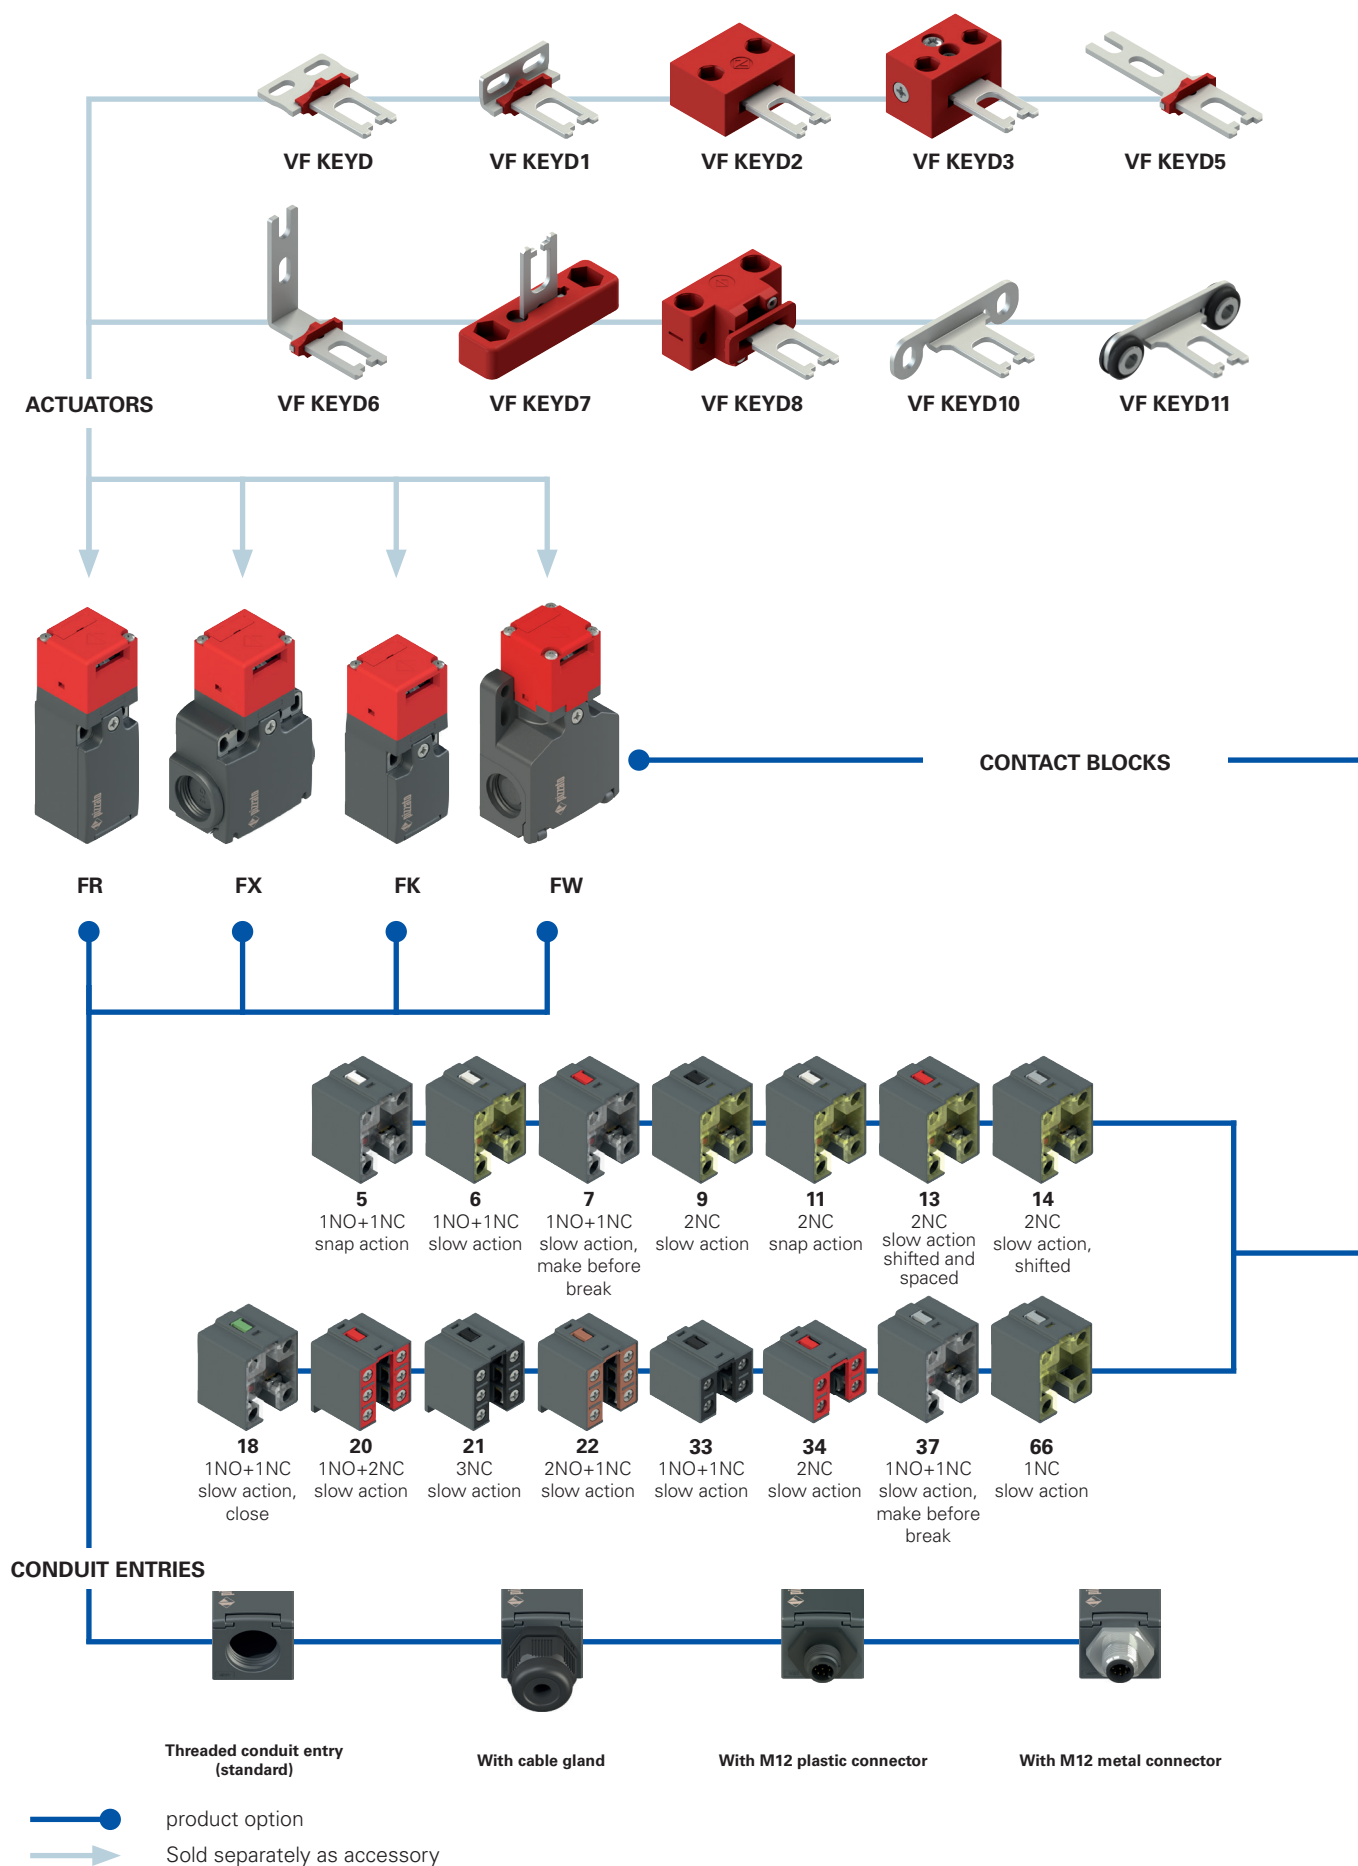

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office

article options options
FR 693-E3D1XGM2K70T6

Housing	
FR	technopolymer, one conduit entry
FX	technopolymer, two conduit entries
FW	technopolymer, three conduit entries

Contact blocks	
5	1NO+1NC, snap action
6	1NO+1NC, slow action
7	1NO+1NC, slow action, make before break
9	2NC, slow action
11	2NC, snap action
13	2NC, slow action, shifted and spaced
14	2NC, slow action, shifted
18	1NO+1NC, slow action, close
20	1NO+2NC, slow action
21	3NC, slow action
22	2NO+1NC, slow action
33	1NO+1NC, slow action
34	2NC, slow action
37	1NO+1NC, slow action, make before break
66	1NC, slow action

Head type	
92	detachable head (FW housing only)
93	non-detachable head (FR, FX and FK housing only)

Actuator extraction force	
	10 N (standard)
E3	30 N

Ambient temperature	
	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Pre-installed cable glands or connectors	
	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 ... 12 mm
...	...
K70	M12 plastic connector, 4-pole
...	...

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry	
M2	M20x1.5 (standard)
M1	M16x1.5
	PG 13.5 (FR-FX housing only)
A	PG 11 (FR-FX housing only)

Contact type	
	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 22, 33, 34)

External metallic parts	
	zinc-plated steel (standard)
X	stainless steel

Actuators	
	without actuator (standard)
D	straight actuator VF KEYD
D1	angled actuator VF KEYD1
D2	jointed actuator VF KEYD2
...	...

article options options
FK 3393-E3D1XGM2K24T6

Housing	
FK	technopolymer, one conduit entry

Contact blocks	
33	1NO+1NC, slow action
34	2NC, slow action

Actuator extraction force	
	10 N (standard)
E3	30 N

Actuators	
	without actuator (standard)
D	straight actuator VF KEYD
D1	angled actuator VF KEYD1
D2	jointed actuator VF KEYD2
...	...

Ambient temperature	
	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Pre-installed cable glands or connectors	
	no cable gland or connector (standard)
K24	cable gland for cables Ø 5 ... 10 mm
K70	M12 plastic connector, 4-pole

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry	
M2	M20x1.5 (standard)
	PG 11

External metallic parts	
	zinc-plated steel (standard)
X	stainless steel

Contact type	
	silver contacts (standard)
G	silver contacts with 1 µm gold coating



Main features

- Metal housing or technopolymer housing, from one to three conduit entries
- Protection degree IP67
- 9 contact blocks available
- 6 stainless steel actuators available
- Versions with M12 connector
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval:	EG605
UL approval:	E131787
CCC approval:	2021000305000099
EAC approval:	RU C-IT.YT03.B.00035/19

Technical data

Housing

FP series housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: 
 FD, FL and FC series: metal housing, baked powder coating.
 Metal head, baked powder coating.
 FD, FP, FC series: one threaded conduit entry: M20x1.5 (standard)
 FL series: three threaded conduit entries: M20x1.5 (standard)
 Protection degree: IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

General data

SIL (SIL CL) up to:	SIL 3 acc. to EN 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Mechanical interlock, coded:	type 2 acc. to EN ISO 14119
Coding level:	low acc. to EN ISO 14119
Safety parameter B _{10D} :	2,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C ... +80°C (standard) -40°C ... +80°C (T6 option)
Max. actuation frequency:	3600 operating cycles/hour
Mechanical endurance:	1 million operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Actuator extraction force:	10 N~
Tightening torques for installation:	see page 441
Wire cross-sections and wire stripping lengths:	see page 461

In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, BG-GS-ET-15, UL 508, CSA C22.2 No. 14.

Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5.

Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 439 to 454.

Electrical data		Utilization category	
without connector	Thermal current (I _{th}):	10 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U _i):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 20, 21, 22, 33, 34)	U _e (V) 250 400 500
	Rated impulse withstand voltage (U _{imp}):	6 kV 4 kV (contact blocks 20, 21, 22, 33, 34)	I _e (A) 6 4 1
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	Direct current: DC13
with M12 connector, 4 or 5-pole	Protection against short circuits:	type aM fuse 10 A 500 V	U _e (V) 24 125 250
	Pollution degree:	3	I _e (A) 3 0.55 0.3
	Thermal current (I _{th}):	4 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U _i):	250 Vac 300 Vdc	U _e (V) 24 120 250
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 4 A 500 V	I _e (A) 4 4 4
	Pollution degree:	3	Direct current: DC13
	Thermal current (I _{th}):	2 A	U _e (V) 24 125 250
	Rated insulation voltage (U _i):	30 Vac 36 Vdc	I _e (A) 3 0.55 0.3
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 2 A 500 V	Direct current: DC13
	Pollution degree:	3	U _e (V) 24
	Thermal current (I _{th}):	2 A	I _e (A) 2
	Rated insulation voltage (U _i):	30 Vac 36 Vdc	Direct current: DC13
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 2 A 500 V	U _e (V) 24
	Pollution degree:	3	I _e (A) 2
	Thermal current (I _{th}):	2 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U _i):	30 Vac 36 Vdc	U _e (V) 24
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 2 A 500 V	I _e (A) 2
	Pollution degree:	3	Direct current: DC13
	Thermal current (I _{th}):	2 A	U _e (V) 24
	Rated insulation voltage (U _i):	30 Vac 36 Vdc	I _e (A) 2




Description



These safety switches are ideal for controlling gates, sliding doors and other guards which protect dangerous parts of machines without inertia.


The stainless steel actuator is fastened to the moving part of the guard in such a way that it is separated from the switch each time the guard is opened. A special mechanism ensures that removing the actuator forces the positive opening of the electrical contacts. Easy to install, these switches can be used with all types of guards (with hinge as well as sliding and removable types). The possibility to actuate the switch only with a specific actuator guarantees that the machine can be restarted only after the guard has been closed. These switches are made of robust materials with larger dimensions and are designed especially for heavy gates and harsh environments.

Head with variable orientation

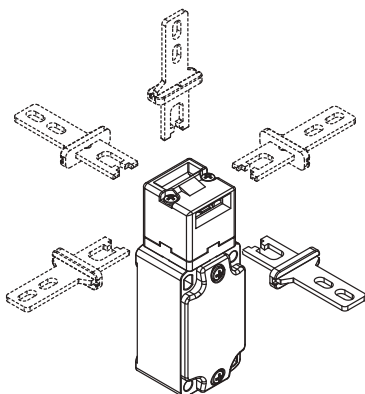

For all switches, the head can be adjusted in 90° steps after removing the two fastening screws. In this way it is possible to actuate the switch from 5 different directions.

Wide-ranging actuator travel



The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.


Protection degree IP67

IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529.

They can therefore be used in all environments where the maximum degree of protection is required for the housing.

Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.

Extended temperature range

-40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

Features approved by IMQ

Rated insulation voltage (Ui):	500 Vac 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 33, 34, 37)
Conventional free air thermal current (Ith):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U _{imp}):	6 kV 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34) IP67
Protection degree of the housing:	3
MV terminals (screw terminals)	AC15
Pollution degree:	400 Vac (50 Hz)
Utilization category:	3 A
Operating voltage (Ue):	
Operating current (Ie):	
Forms of the contact element:	Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.
Positive opening of contacts on contact blocks	5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.
In compliance with standards:	EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

Features approved by UL

Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	Types 1, 4X, 12, 13
Use	60 or 75 °C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm).
For FP series:	the hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.


Contact type:

R = snap action
L = slow action
LO = slow action, make before break

Contact block

	Technopolymer housing Without actuator	Metal housing Without actuator	Metal housing Without actuator	Metal housing Without actuator
5	R FP 593-M2 $\rightarrow$ 1NO+1NC 	R FD 593-M2 $\rightarrow$ 1NO+1NC 	R FL 593-M2 $\rightarrow$ 1NO+1NC 	/
6	L FP 693-M2 $\rightarrow$ 1NO+1NC 	L FD 693-M2 $\rightarrow$ 1NO+1NC 	L FL 693-M2 $\rightarrow$ 1NO+1NC 	/
7	LO FP 793-M2 $\rightarrow$ 1NO+1NC 	LO FD 793-M2 $\rightarrow$ 1NO+1NC 	LO FL 793-M2 $\rightarrow$ 1NO+1NC 	/
9	L FP 993-M2 $\rightarrow$ 2NC 	L FD 993-M2 $\rightarrow$ 2NC 	L FL 993-M2 $\rightarrow$ 2NC 	/
20	L FP 2093-M2 $\rightarrow$ 1NO+2NC 	L FD 2093-M2 $\rightarrow$ 1NO+2NC 	L FL 2093-M2 $\rightarrow$ 1NO+2NC 	/
21	L FP 2193-M2 $\rightarrow$ 3NC 	L FD 2193-M2 $\rightarrow$ 3NC 	L FL 2193-M2 $\rightarrow$ 3NC 	/
22	L FP 2293-M2 $\rightarrow$ 2NO+1NC 	L FD 2293-M2 $\rightarrow$ 2NO+1NC 	L FL 2293-M2 $\rightarrow$ 2NO+1NC 	/
33	L FP 3393-M2 $\rightarrow$ 1NO+1NC 	L FD 3393-M2 $\rightarrow$ 1NO+1NC 	L FL 3393-M2 $\rightarrow$ 1NO+1NC 	FC 3393-M2 $\rightarrow$ 1NO+1NC
34	L FP 3493-M2 $\rightarrow$ 2NC 	L FD 3493-M2 $\rightarrow$ 2NC 	L FL 3493-M2 $\rightarrow$ 2NC 	FC 3493-M2 $\rightarrow$ 2NC
Actuating force	10 N (18 N $\rightarrow$)	10 N (18 N $\rightarrow$)	10 N (18 N $\rightarrow$)	10 N (18 N $\rightarrow$)

How to read travel diagrams

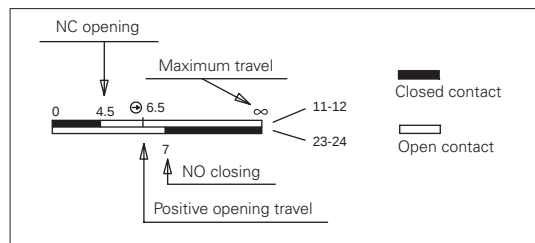

IMPORTANT:

The state of the NC contact refers to the switch with inserted actuator. In **safety applications**, actuate the switch **at least up to the positive opening travel** shown in the travel diagrams with symbol $\rightarrow$. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

Limits of use




- Do not use where dust and dirt may penetrate in any way into the head and deposit there. In particular where metal dust, concrete or chemicals are spread.
- Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks.
- Do not use in environments with presence of explosive or flammable gases or dusts. In these cases use ATEX products (see dedicated Pizzato catalogue).




Stainless steel actuators

IMPORTANT: These actuators can be used only with items of the FD, FP, FL, FC and FS series (e.g. FD 693-M2).


Low level of coding acc. to EN ISO 14119.

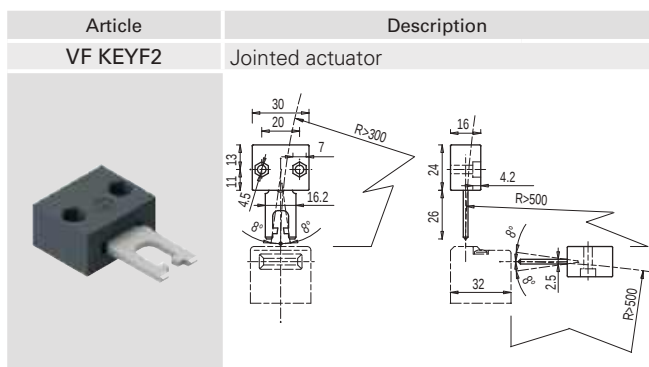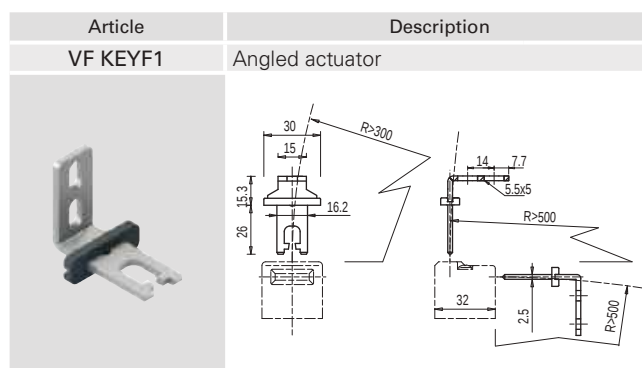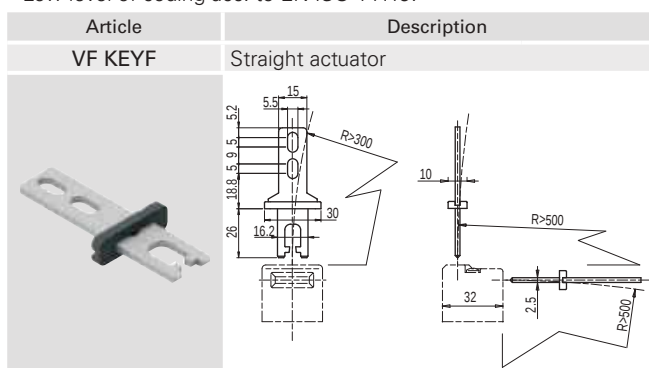


The actuator can flex in four directions for applications where the guard alignment is not precise.

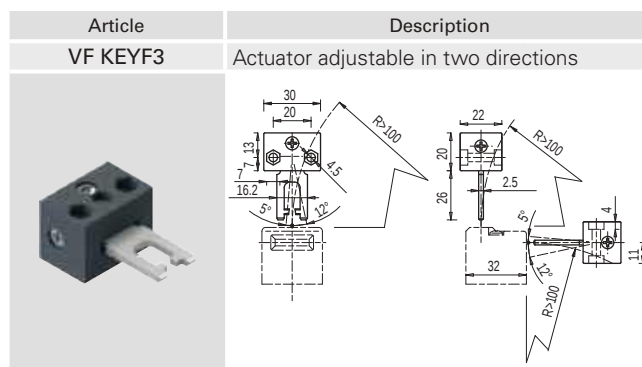

Actuator adjustable in two directions for guards with reduced dimensions.

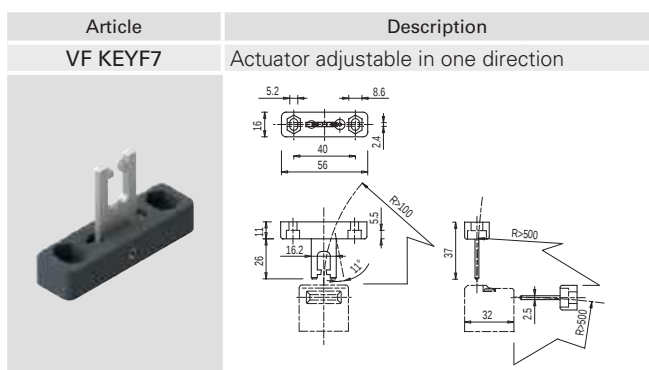


Actuator adjustable in one direction for guards with reduced dimensions.

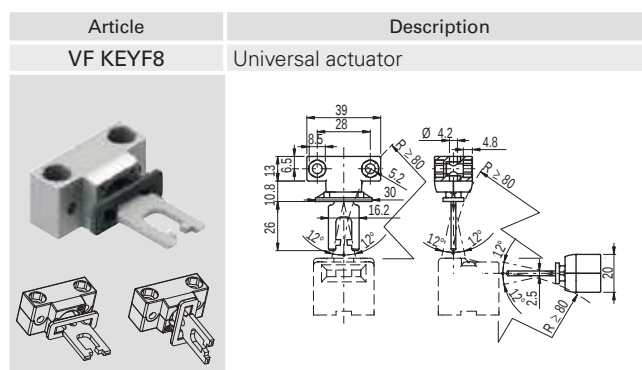

Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.


Accessories

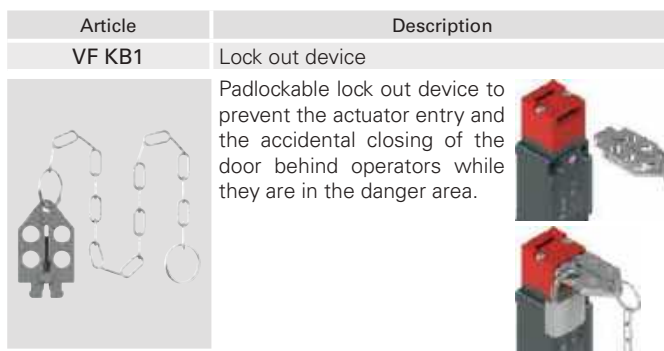

Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.



Selection diagram

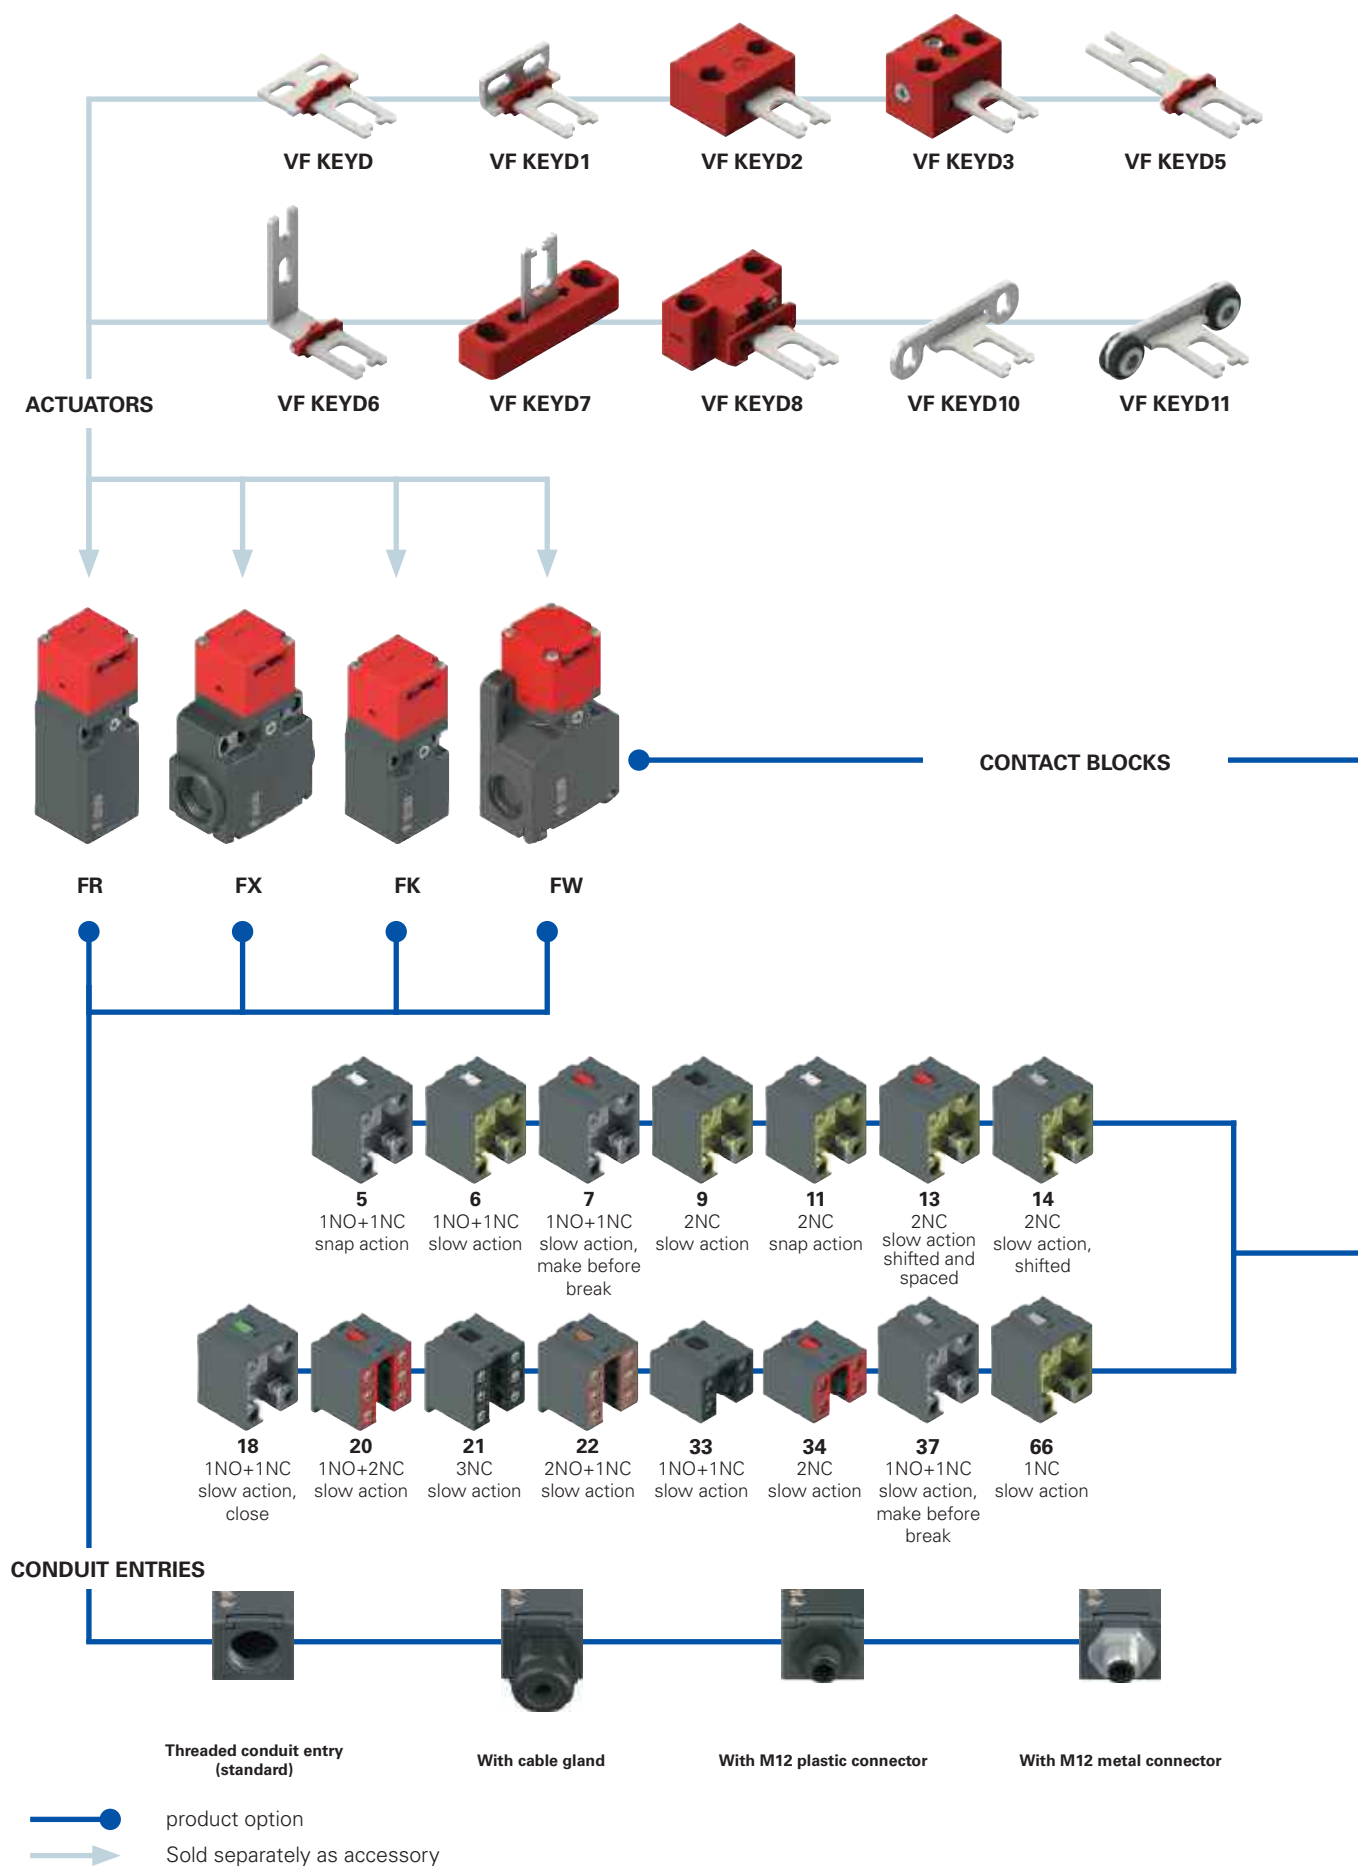



Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office

article options options
FR 693-E3D1XGM2K70T6

Housing

FR	technopolymer, one conduit entry
FX	technopolymer, two conduit entries
FW	technopolymer, three conduit entries

Contact blocks

5	1NO+1NC, snap action
6	1NO+1NC, slow action
7	1NO+1NC, slow action, make before break
9	2NC, slow action
11	2NC, snap action
13	2NC, slow action, shifted and spaced
14	2NC, slow action, shifted
18	1NO+1NC, slow action, close
20	1NO+2NC, slow action
21	3NC, slow action
22	2NO+1NC, slow action
33	1NO+1NC, slow action
34	2NC, slow action
37	1NO+1NC, slow action, make before break
66	1NC, slow action

Head type

92	detachable head (FW housing only)
93	non-detachable head (FR, FX and FK housing only)

Actuator extraction force

	10 N (standard)
E3	30 N

Actuators

	without actuator (standard)
D	straight actuator VF KEYD
D1	angled actuator VF KEYD1
D2	jointed actuator VF KEYD2
...	...

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 ... 12 mm
...	...
K70	M12 plastic connector, 4-pole
...	...

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2	M20x1.5 (standard)
M1	M16x1.5
	PG 13.5 (FR-FX housing only)
A	PG 11 (FR-FX housing only)

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 22, 33, 34)

External metallic parts

	zinc-plated steel (standard)
X	stainless steel

article options options
FK 3393-E3D1XGM2K24T6

Housing

FK	technopolymer, one conduit entry
-----------	----------------------------------

Contact blocks

33	1NO+1NC, slow action
34	2NC, slow action

Actuator extraction force

	10 N (standard)
E3	30 N

Actuators

	without actuator (standard)
D	straight actuator VF KEYD
D1	angled actuator VF KEYD1
D2	jointed actuator VF KEYD2
...	...

Ambient temperature

	-25°C ... +80°C (standard)
T6	-40°C ... +80°C

Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K24	cable gland for cables Ø 5 ... 10 mm
K70	M12 plastic connector, 4-pole

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2	M20x1.5 (standard)
	PG 11

External metallic parts

	zinc-plated steel (standard)
X	stainless steel

Contact type

	silver contacts (standard)
G	silver contacts with 1 µm gold coating



Main features

- Technopolymer housing, from one to three conduit entries
- Hinged cover, fixed with single captive screw
- Metal plates on mounting holes of the housing (FR, FX, FK)
- Protection degree IP 67 and IP69K
- 15 contact blocks available
- 10 stainless steel actuators available
- Versions with M12 connector
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2021000305000101
EAC approval:	RU C-IT.YT03.B.00035/19

Technical data

Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: 

FR series, one conduit entry:	M20x1.5 (standard)
FK series: one threaded conduit entry:	M20x1.5 (standard)
FX series: two knock-out threaded conduit entries:	M20x1.5 (standard)
FW series - three knock-out threaded conduit entries:	M20x1.5 (standard)
Protection degree FR, FK, FX:	IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)
	IP69K acc. to ISO 20653 (with cable gland of equal or higher protection degree)
Protection degree FW:	IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)

General data

SIL (SIL CL) up to:	SIL 3 acc. to EN 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Mechanical interlock, coded:	type 2 acc. to EN ISO 14119
Coding level:	low acc. to EN ISO 14119
Safety parameter B_{10D} :	2,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C ... +80°C (standard)
	-40°C ... +80°C (T6 option)
Max. actuation frequency:	3600 operating cycles/hour
Mechanical endurance:	1 million operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Actuator extraction force:	10 N~ (30 N~ -E3 versions)
Tightening torques for installation:	see page 439
Wire cross-sections and wire stripping lengths:	see page 461

In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, BG-GS-ET-15, UL 508, CSA C22.2 No. 14.

Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5.

Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

 If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 439 to 454.

Electrical data			Utilization category		
without connector	Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz)		
	Rated insulation voltage (U_i):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 20, 21, 22, 33, 34)	U_e (V)	250	400
	Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (contact blocks 20, 21, 22, 33, 34)	I_e (A)	6	4
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	Direct current: DC13		
with M12 connector, 4-pole	Protection against short circuits:	type aM fuse 10 A 500 V	U_e (V)	24	125
	Pollution degree:	3	I_e (A)	3	0.55
	Thermal current (I_{th}):	4 A	250		
	Rated insulation voltage (U_i):	250 Vac 300 Vdc	U_e (V)	24	120
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 4 A 500 V	I_e (A)	4	4
	Pollution degree:	3	Direct current: DC13		
	Thermal current (I_{th}):	2 A	U_e (V)	24	125
	Rated insulation voltage (U_i):	30 Vac 36 Vdc	I_e (A)	3	0.55
with M12 connector, 8-pole	Protection against short circuits:	type gG fuse 2 A 500 V	250		
	Pollution degree:	3	Direct current: DC13		
	Thermal current (I_{th}):	2 A	U_e (V)	24	
	Rated insulation voltage (U_i):	30 Vac 36 Vdc	I_e (A)	2	




Description




These safety switches are ideal for controlling gates, sliding doors and other guards which protect dangerous parts of machines without inertia. The stainless steel actuator is fastened to the moving part of the guard in such a way that it is separated from the switch each time the guard is opened. A special mechanism ensures that removing the actuator forces the positive opening of the electrical contacts. Easy to install, these switches can be used with all types of guards (with hinge as well as sliding and removable types). The possibility to actuate the switch only with a specific actuator guarantees that the machine can be restarted only after the guard has been closed.

Head with variable orientation

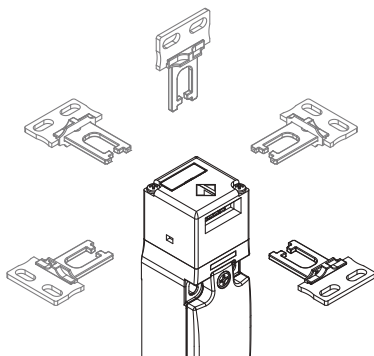


For all switches, the head can be adjusted in 90° steps after removing the two fastening screws. In this way it is possible to actuate the switch from 5 different directions.

Wide-ranging actuator travel

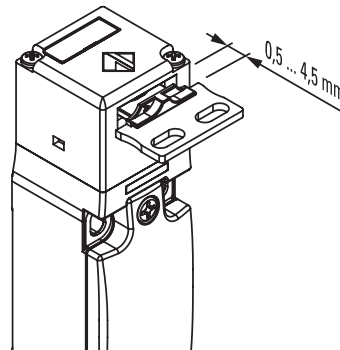


The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

Not detachable head



To make head adjustment safer and smoother, these switches are equipped with a special head to body coupling system. This system makes it impossible to remove the head from the device even during adjustment, thus rendering the use of one-way screws unnecessary for locking the head in position once adjustment is complete. This solution is available for the FR, FX and FK series.

Versions with 30 N actuator extraction force



Versions with 30 N actuator holding force instead of the standard 10 N are available.


Protection degrees IP67 and IP69K

IP69K
IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing.

Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.

Extended temperature range

-40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

Features approved by IMQ

Rated insulation voltage (Ui):	500 Vac 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 37, 33, 34)
Conventional free air thermal current (Ith):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U _{imp}):	6 kV 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)
Protection degree of the housing:	IP67
MV terminals (screw terminals)	
Pollution degree:	3
Utilization category:	AC15
Operating voltage (U _e):	400 Vac (50 Hz)
Operating current (I _e):	3 A
Forms of the contact element:	Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.
Positive opening of contacts on contact blocks	5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.
In compliance with standards:	EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

Features approved by UL





Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	FR: Types 1, 4X FX, FK, FW: Types 1, 4X, 12, 13
Use	Use 60 or 75 °C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm).
The hub is to be connected to the conduit before the hub is connected to the enclosure.	

Please contact our technical department for the list of approved products.

Contact type:
R = snap action
L = slow action
LO = slow action
 make before


break
LS = slow action
 shifted
LV = slow action
 shifted and
 spaced
LA = slow action
 close

Contact block

		Technopolymer housing Without actuator	Technopolymer housing Without actuator	Technopolymer housing Without actuator	Technopolymer housing Without actuator
					
5	R	FR 593-M2 → 1NO+1NC	FX 593-M2 → 1NO+1NC	FW 592-M2 → 1NO+1NC	/
6	L	FR 693-M2 → 1NO+1NC	FX 693-M2 → 1NO+1NC	FW 692-M2 → 1NO+1NC	/
7	LO	FR 793-M2 → 1NO+1NC	FX 793-M2 → 1NO+1NC	FW 792-M2 → 1NO+1NC	/
9	L	FR 993-M2 → 2NC	FX 993-M2 → 2NC	FW 992-M2 → 2NC	/
11	R	FR 1193-M2 → 2NC	FX 1193-M2 → 2NC	FW 1192-M2 → 2NC	/
13	LV	FR 1393-M2 → 2NC	FX 1393-M2 → 2NC	FW 1392-M2 → 2NC	/
14	LS	FR 1493-M2 → 2NC	FX 1493-M2 → 2NC	FW 1492-M2 → 2NC	/
18	LA	FR 1893-M2 → 1NO+1NC	FX 1893-M2 → 1NO+1NC	FW 1892-M2 → 1NO+1NC	/
20	L	FR 2093-M2 → 1NO+2NC	FX 2093-M2 → 1NO+2NC	FW 2092-M2 → 1NO+2NC	/
21	L	FR 2193-M2 → 3NC	FX 2193-M2 → 3NC	FW 2192-M2 → 3NC	/
22	L	FR 2293-M2 → 2NO+1NC	FX 2293-M2 → 2NO+1NC	FW 2292-M2 → 2NO+1NC	/
33	L	FR 3393-M2 → 1NO+1NC	FX 3393-M2 → 1NO+1NC	FW 3392-M2 → 1NO+1NC	FK 3393-M2 → 1NO+1NC
34	L	FR 3493-M2 → 2NC	FX 3493-M2 → 2NC	FW 3492-M2 → 2NC	FK 3493-M2 → 2NC
37	LO	FR 3793-M2 → 1NO+1NC	FX 3793-M2 → 1NO+1NC	FW 3792-M2 → 1NO+1NC	/
66	L	FR 6693-M2 → 1NC	FX 6693-M2 → 1NC	FW 6692-M2 → 1NC	/
Actuating force		10 N (18 N →)	10 N (18 N →)	10 N (18 N →)	10 N (18 N →)
Travel diagrams		page 446 - group 8	page 446 - group 8	page 446 - group 8	page 446 - group 8

All switches listed above are available in a version with 30 N actuator extraction force.

To obtain these products, the order code must be changed by adding the extension "E3", for example FR 693-M2E3.



Extraction force for 30 N versions	30 N~ (38 N →)	30 N~ (38 N →)	30 N~ (38 N →)	30 N~ (38 N →)
---------------------------------------	----------------	----------------	----------------	----------------

Limits of use

- Do not use where dust and dirt may penetrate in any way into the head and deposit there. In particular where metal dust, concrete or chemicals are spread.
- Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks.
- Do not use in environments with presence of explosive or flammable gases or dusts. In these cases use ATEX products (see dedicated Pizzato catalogue).

IMPORTANT: These actuators can only be used with items of the FR, FX, FK and FW series (e.g. FR 693-M2).
Low level of coding acc. to EN ISO 14119.

Article	Description
VF KEYD	Straight actuator

Article	Description
VF KEYD2	Jointed actuator

The actuator can flex in four directions for applications where the guard alignment is not precise.

Article	Description
VF KEYD5	Extended actuator

Article	Description
VF KEYD7	Actuator adjustable in one direction

Actuator adjustable in one direction for guards with reduced dimensions.

Article	Description
VF KEYD10	Profiled actuator

Article	Description
VF KEYD1	Angled actuator

Article	Description
VF KEYD3	Actuator adjustable in two directions

Actuator adjustable in two directions for guards with reduced dimensions.

Article	Description
VF KEYD6	Extended actuator, angled

Article	Description
VF KEYD8	Universal actuator

Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

Article	Description
VF KEYD11	Profiled actuator

All values in the drawings are in mm

Accessories See page 419



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: poz@nt-rt.ru || сайт: <https://pizzato.nt-rt.ru/>